



Chapter 9: Differential Analysis of Fluid Flow



9-1 Introduction

9-2 Conservation of Mass

9-3 The Stream Function

9-4 Conservation of Linear Momentum

9-5 Navier Stokes Equation

9-6 Differential Analysis of Fluid Flow Problems


9-1 Introduction (1)

■ Recall

- Chap 5: Control volume (CV) versions of the laws of conservation of mass and energy
- Chap 6: CV version of the conservation of momentum

■ CV, or integral, forms of equations are useful for determining overall effects

■ However, we cannot obtain detailed knowledge about the flow field inside the CV $\Rightarrow$ motivation for ***differential analysis***

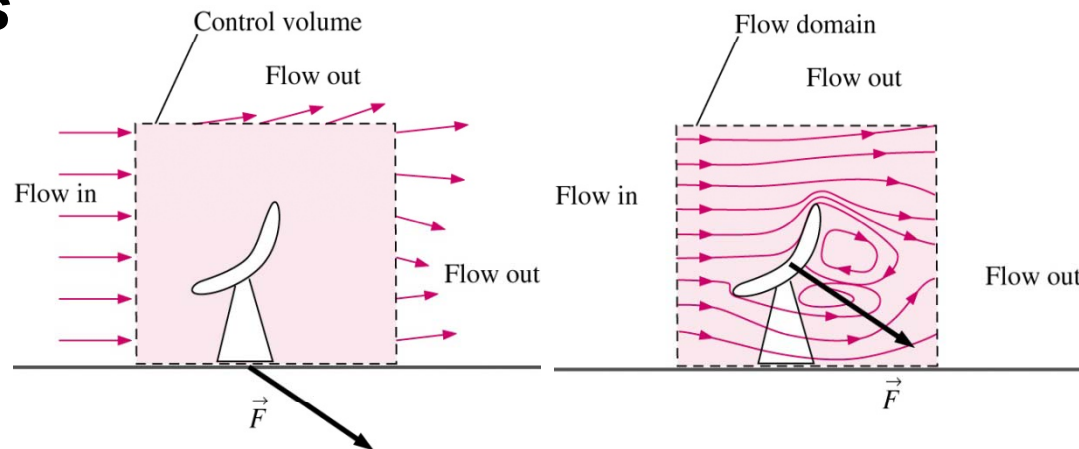

9-1

9-1 Introduction (2)

- Example: incompressible Navier-Stokes equations

$$\nabla \cdot \vec{V} = 0$$

$$\rho \frac{\partial \vec{V}}{\partial t} + \rho \left(\vec{V} \cdot \nabla \right) \vec{V} = -\nabla p + \mu \nabla^2 \vec{V} + \rho \vec{g}$$

- We will learn:
 - Physical meaning of each term
 - How to derive
 - How to solve

9-2

9-1 Introduction (3)

■ For example, how to solve?

Step	Analytical Fluid Dynamics (Chapter 9)	Computational Fluid Dynamics (Chapter 15)
1	Setup Problem and geometry, identify all dimensions and parameters	
2	List all assumptions, approximations, simplifications, boundary conditions	
3	Simplify PDE's	Build grid / discretize PDE's
4	Integrate equations	Solve algebraic system of equations including I.C.'s and B.C's
5	Apply I.C.'s and B.C.'s to solve for constants of integration	
6	Verify and plot results	Verify and plot results

9-3

9-2 Conservation of Mass (1)

- Recall CV form (Chap 5) from Reynolds Transport Theorem (RTT)

$$0 = \int_{CV} \frac{\partial \rho}{\partial t} d\mathcal{V} + \int_{CS} \rho (\vec{V} \cdot \vec{n}) dA$$

- We'll examine two methods to derive differential form of conservation of mass
 - Divergence (Gauss's) Theorem
 - Differential CV and Taylor series expansions

9-2 Conservation of Mass (2)

- Divergence theorem allows us to transform a volume integral of the divergence of a vector into an area integral over the surface that defines the volume.

$$\int_V \nabla \cdot \vec{G} dV = \oint_A \vec{G} \cdot \vec{n} dA$$

9-2 Conservation of Mass (3)

- Rewrite conservation of momentum

$$\int_V \frac{\partial \rho}{\partial t} dV + \oint_A \rho (\vec{V} \cdot \vec{n}) dA = 0$$

- Using divergence theorem, replace area integral with volume integral and collect terms

$$\int_V \frac{\partial \rho}{\partial t} dV + \int_V \nabla \cdot \rho \vec{V} dV = 0 \quad \Longrightarrow \quad \int_V \left[\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{V}) \right] dV = 0$$


- Integral holds for **ANY** CV, therefore:

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{V}) = 0$$

9-6

9-2 Conservation of Mass (4)

- First, define an infinitesimal control volume $dx \times dy \times dz$
- Next, we approximate the mass flow rate into or out of each of the 6 faces using Taylor series expansions around the center point, e.g., at the right face

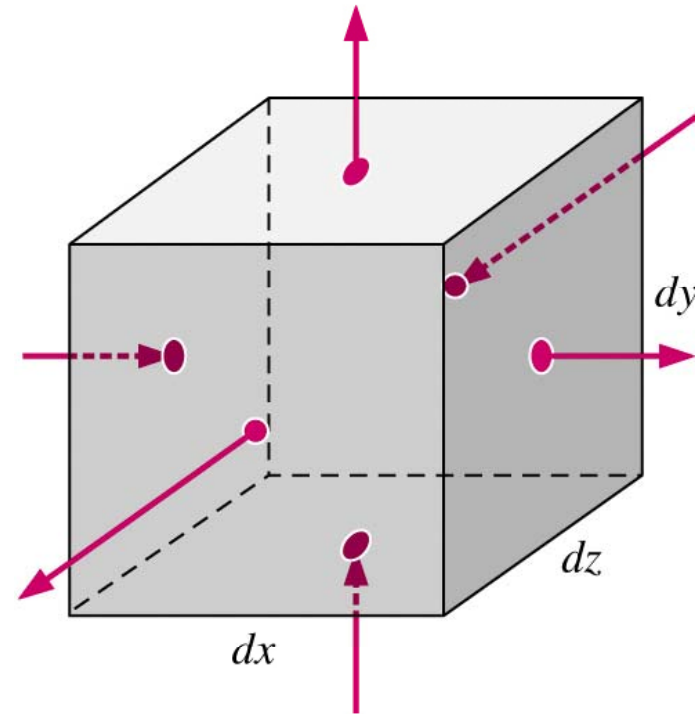


Ignore terms higher than order dx

$$(\rho u)_{\text{center of right face}} = \rho u + \frac{\partial (\rho u)}{\partial x} \frac{dx}{2} + \frac{1}{2!} \frac{\partial^2 (\rho u)}{\partial x^2} \left(\frac{dx}{2} \right)^2 + \dots$$

9-7

9-2 Conservation of Mass (5)

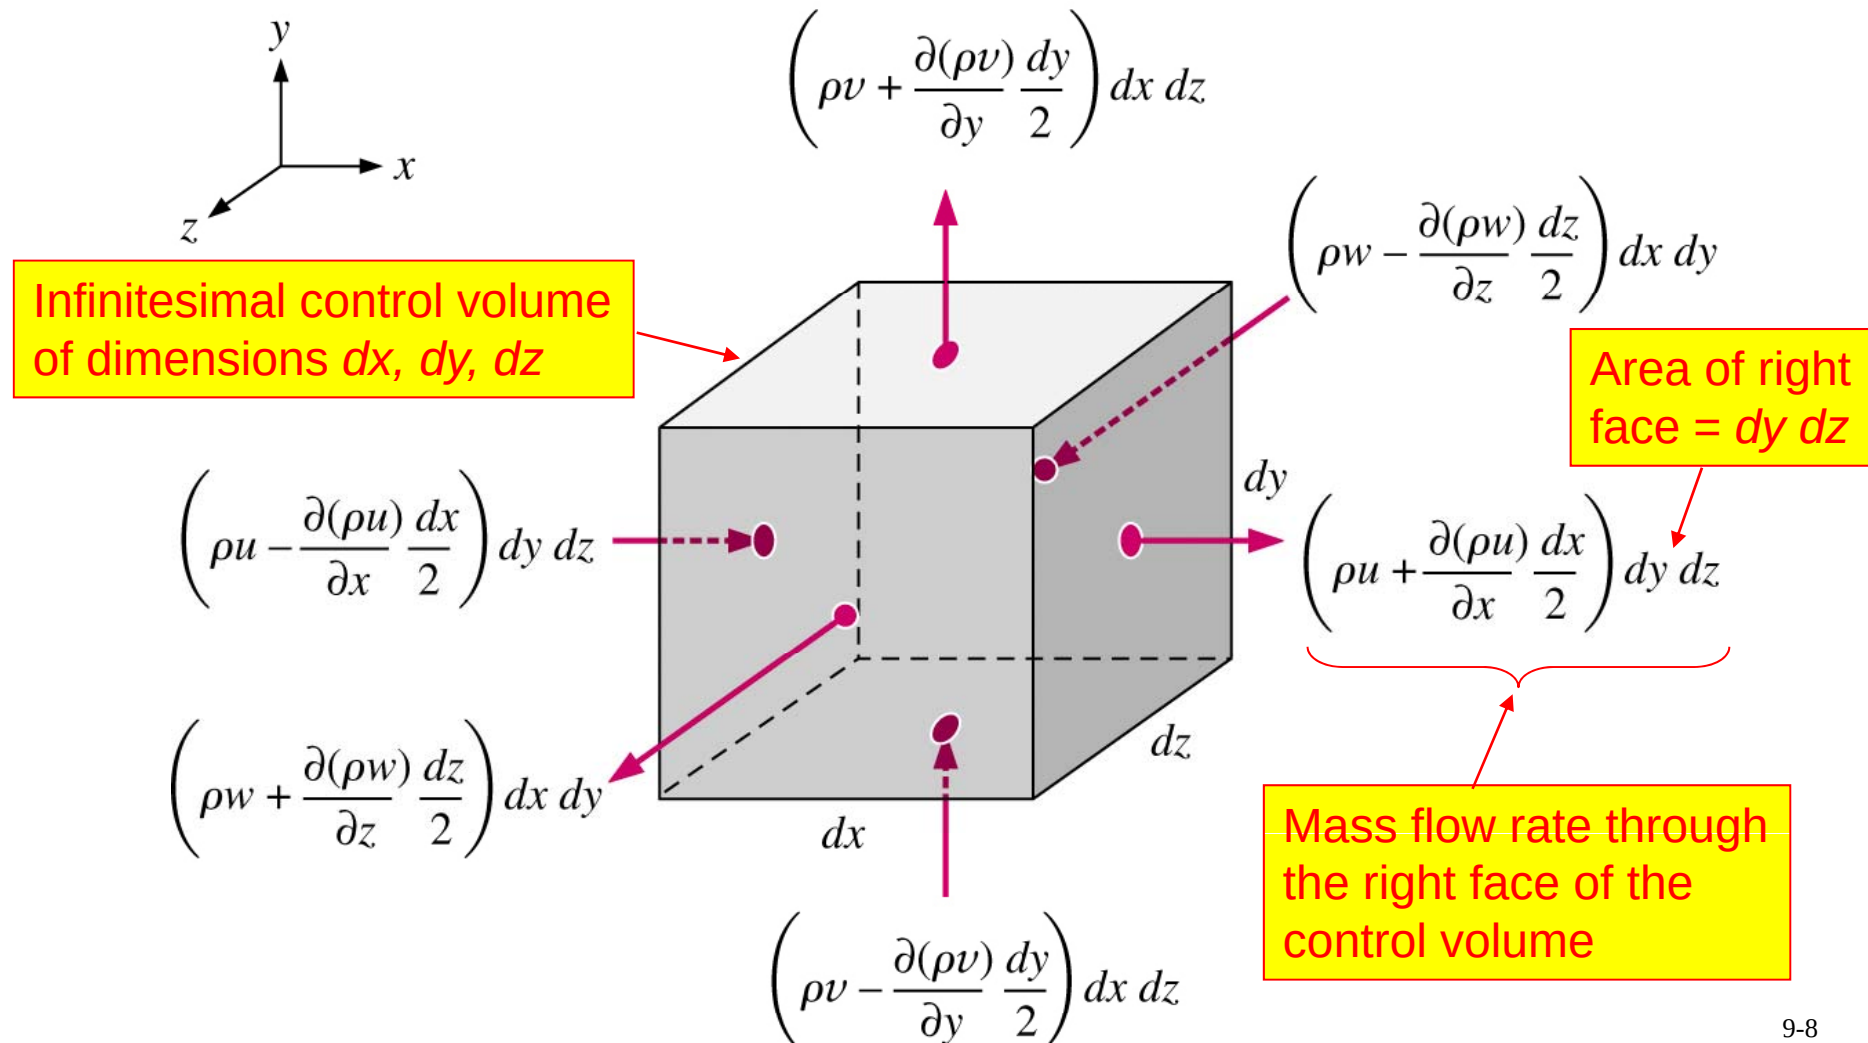

9-8

9-2 Conservation of Mass (6)

- Now, sum up the mass flow rates into and out of the 6 faces of the CV

Net mass flow rate into CV:

$$\sum_{in} \dot{m} \approx \left(\rho u - \frac{\partial(\rho u)}{\partial x} \frac{dx}{2} \right) dy dz + \left(\rho v - \frac{\partial(\rho v)}{\partial y} \frac{dy}{2} \right) dx dz + \left(\rho w - \frac{\partial(\rho w)}{\partial z} \frac{dz}{2} \right) dx dy$$

Net mass flow rate out of CV:

$$\sum_{out} \dot{m} \approx \left(\rho u + \frac{\partial(\rho u)}{\partial x} \frac{dx}{2} \right) dy dz + \left(\rho v + \frac{\partial(\rho v)}{\partial y} \frac{dy}{2} \right) dx dz + \left(\rho w + \frac{\partial(\rho w)}{\partial z} \frac{dz}{2} \right) dx dy$$

- Plug into integral conservation of mass equation

$$\int_{CV} \frac{\partial \rho}{\partial t} dV = \sum_{in} \dot{m} - \sum_{out} \dot{m}$$

9-9

9-2 Conservation of Mass (7)

■ After substitution,

$$\frac{\partial \rho}{\partial t} dx dy dz = -\frac{\partial(\rho u)}{\partial x} dx dy dz - \frac{\partial(\rho v)}{\partial x} dx dy dz - \frac{\partial(\rho w)}{\partial x} dx dy dz$$

■ Dividing through by volume $dx dy dz$

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial x} + \frac{\partial(\rho w)}{\partial x} = 0$$

Or, if we apply the definition of the divergence of a vector

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

9-10

9-2 Conservation of Mass (8)

Alternative form

- Use product rule on divergence term

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = \frac{\partial \rho}{\partial t} + \vec{V} \cdot \nabla \rho + \rho \nabla \cdot \vec{V} = 0$$

$$\frac{D\rho}{Dt} + \rho \nabla \cdot \vec{V} = 0$$

$$\frac{1}{\rho} \frac{D\rho}{Dt} + \nabla \cdot \vec{V} = 0$$

9-2 Conservation of Mass (9)

- There are many problems which are simpler to solve if the equations are written in cylindrical-polar coordinates
- Easiest way to convert from Cartesian is to use vector form and definition of divergence operator in cylindrical coordinates


The Divergence Operation

Cartesian coordinates:

$$\vec{\nabla} \cdot (\rho \vec{V}) = \frac{\partial}{\partial x} (\rho u) + \frac{\partial}{\partial y} (\rho v) + \frac{\partial}{\partial z} (\rho w)$$

Cylindrical coordinates:

$$\vec{\nabla} \cdot (\rho \vec{V}) = \frac{1}{r} \frac{\partial (r \rho u_r)}{\partial r} + \frac{1}{r} \frac{\partial (\rho u_\theta)}{\partial \theta} + \frac{\partial (\rho u_z)}{\partial z}$$

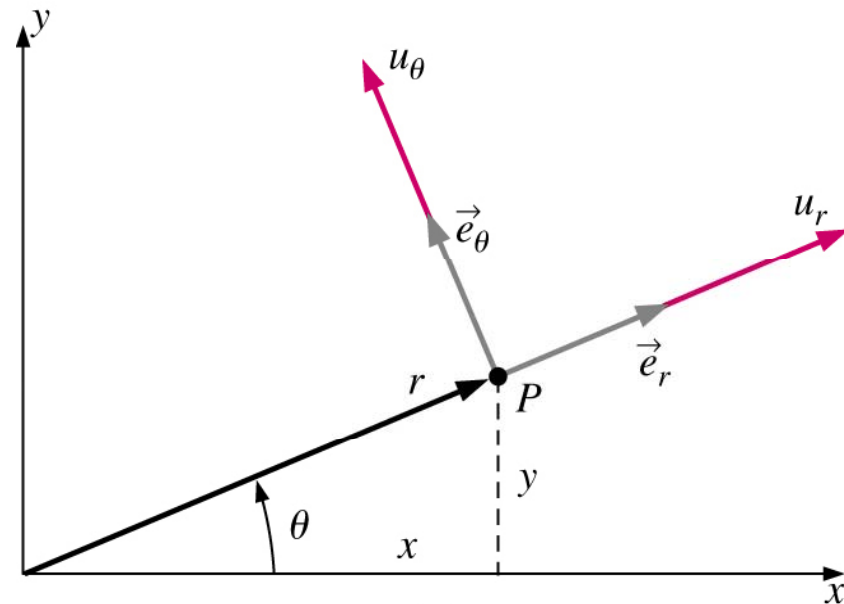

9-12

9-2 Conservation of Mass (10)

$$\vec{\nabla} = \frac{1}{r} \frac{\partial(r)}{\partial r} \hat{e}_r + \frac{1}{r} \frac{\partial}{\partial \theta} \hat{e}_\theta + \frac{\partial}{\partial z} \hat{e}_z$$

$$\vec{V} = U_r \hat{e}_r + U_\theta \hat{e}_\theta + U_z \hat{e}_z$$

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

$$\frac{\partial \rho}{\partial t} + \frac{1}{r} \frac{\partial(r \rho U_r)}{\partial r} + \frac{1}{r} \frac{\partial(\rho U_\theta)}{\partial \theta} + \frac{\partial(\rho U_z)}{\partial z} = 0$$

9-2 Conservation of Mass (11)

Alternative form of the continuity equation:

$$\frac{1}{\rho} \frac{D\rho}{Dt} + \vec{\nabla} \cdot \vec{V} = 0$$

(9-10)

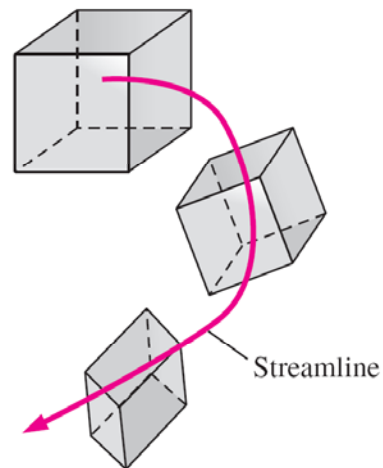


FIGURE 9-9

As a material element moves through a flow field, its density changes according to Eq. 9-10.

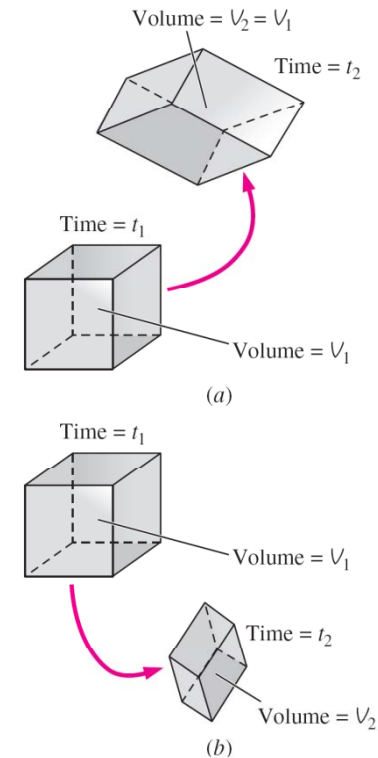


FIGURE 9-16

(a) In an incompressible flow field, fluid elements may translate, distort, and rotate, but they do not grow or shrink in volume; (b) in a compressible flow field, fluid elements may grow or shrink in volume as they translate, distort, and rotate.

9-14

9-2 Conservation of Mass (12)

■ Steady compressible flow

$$\cancel{\frac{\partial \rho}{\partial t}} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

$$\vec{\nabla} \cdot (\rho \vec{V}) = 0$$

Cartesian

$$\frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial x} + \frac{\partial(\rho w)}{\partial x} = 0$$

Cylindrical

$$\frac{\partial \rho}{\partial t} + \frac{1}{r} \frac{\partial(r \rho U_r)}{\partial r} + \frac{1}{r} \frac{\partial(\rho U_\theta)}{\partial \theta} + \frac{\partial(\rho U_z)}{\partial z} = 0$$

9-15

9-2 Conservation of Mass (13)

■ Incompressible flow

$$\frac{\partial \rho}{\partial t} = 0 \quad \text{and } \rho = \text{constant}$$

$$\vec{\nabla} \cdot \vec{V} = 0$$

Cartesian

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

Cylindrical

$$\frac{1}{r} \frac{\partial(rU_r)}{\partial r} + \frac{1}{r} \frac{\partial(U_\theta)}{\partial \theta} + \frac{\partial(U_z)}{\partial z} = 0$$

9-16

9-2 Conservation of Mass (14)

- In general, continuity equation cannot be used by itself to solve for flow field, however it can be used to
 1. Determine if velocity field is incompressible
 2. Find missing velocity component

9-3 The Stream Function (1)

- Consider the continuity equation for an incompressible 2D flow

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0$$

- Substituting the clever transformation

$$u = \frac{\partial \psi}{\partial y} \quad v = -\frac{\partial \psi}{\partial x}$$

- Gives

$$\frac{\partial^2 \psi}{\partial x \partial y} - \frac{\partial^2 \psi}{\partial y \partial x} \equiv 0$$


This is true for any smooth function $\psi(x,y)$

9-3 The Stream Function (2)

- Why do this?
 - Single variable ψ replaces (u,v) . Once ψ is known, (u,v) can be computed.
 - Physical significance
 1. Curves of constant ψ are streamlines of the flow
 2. Difference in ψ between streamlines is equal to volume flow rate between streamlines

9-3 The Stream Function (3)

Physical Significance

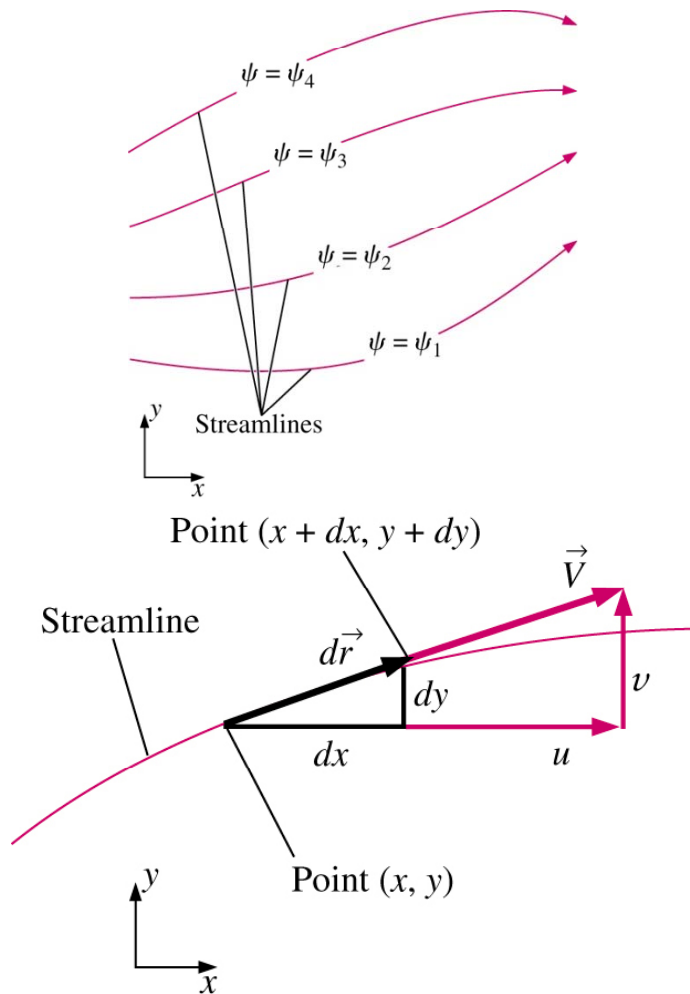

Recall from Chap. 4 that
along a streamline

$$\frac{dy}{dx} = \frac{v}{u} \quad \Rightarrow \quad -v dx + u dy = 0$$

$$\frac{\partial \psi}{\partial x} dx + \frac{\partial \psi}{\partial y} dy = 0$$


$$d\psi = 0$$

$\therefore$ Change in ψ along
streamline is zero

9-20

9-3 The Stream Function (4)

Physical Significance

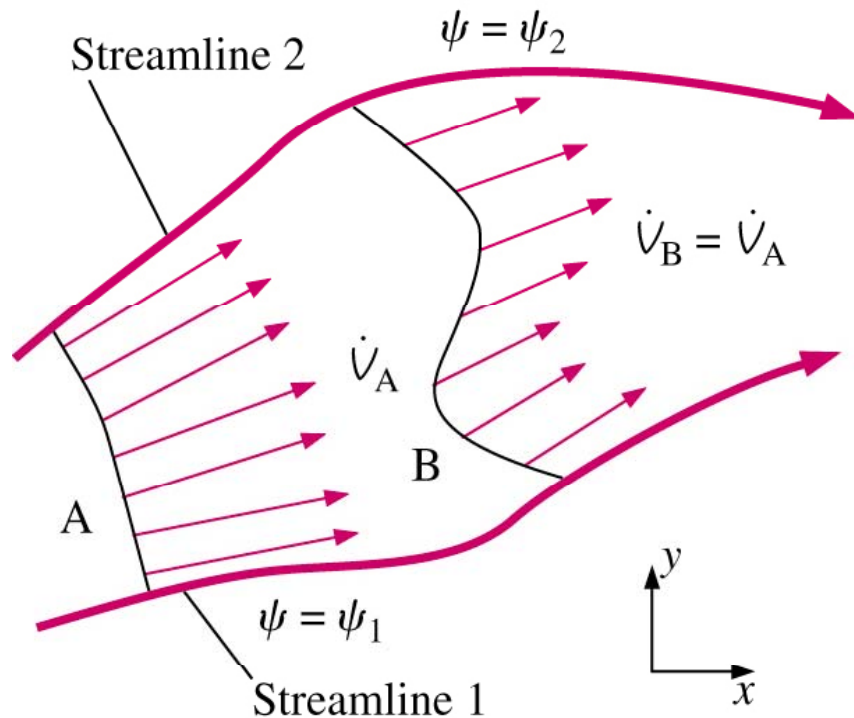

Difference in ψ between streamlines is equal to volume flow rate between streamlines

$$\dot{V}_A = \dot{V}_B = \psi_2 - \psi_1$$

9-4 Conservation of Linear Momentum (1)

■ Recall CV form from Chap. 6

$$\sum \vec{F} = \underbrace{\int_{CV} \rho g \, d\mathcal{V}}_{\text{Body Force}} + \underbrace{\int_{CS} \sigma_{ij} \cdot \vec{n} \, dA}_{\text{Surface Force}} = \int_{CV} \frac{\partial}{\partial t} (\rho \vec{V}) \, d\mathcal{V} + \int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} \, dA$$

σ_{ij} = stress tensor

■ Using the divergence theorem to convert area integrals

$$\int_{CS} \sigma_{ij} \cdot \vec{n} \, dA = \int_{CV} \nabla \cdot \sigma_{ij} \, d\mathcal{V}$$

$$\int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} \, dA = \int_{CV} \nabla \cdot (\rho \vec{V} \vec{V}) \, d\mathcal{V}$$

9-22

9-4 Conservation of Linear Momentum (2)

- Substituting volume integrals gives,

$$\int_{CV} \left[\frac{\partial}{\partial t} (\rho \vec{V}) + \nabla \cdot (\rho \vec{V} \vec{V}) - \rho \vec{g} - \nabla \cdot \sigma_{ij} \right] dV = 0$$

- Recognizing that this holds for any CV, the integral may be dropped

$$\frac{\partial}{\partial t} (\rho \vec{V}) + \nabla \cdot (\rho \vec{V} \vec{V}) = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

This is Cauchy's Equation

Can also be derived using infinitesimal CV and Newton's 2nd Law (see text) ⁹⁻²³

9-4 Conservation of Linear Momentum (3)

- Alternate form of the Cauchy Equation can be derived by introducing

$$\frac{\partial (\rho \vec{V})}{\partial t} = \rho \frac{\partial \vec{V}}{\partial t} + \vec{V} \frac{\partial \rho}{\partial t} \quad (\text{Chain Rule})$$

$$\nabla \cdot (\rho \vec{V} \vec{V}) = \vec{V} \nabla \cdot (\rho \vec{V}) + \rho (\vec{V} \cdot \nabla) \vec{V}$$

- Inserting these into Cauchy Equation and rearranging gives

$$\rho \left[\frac{\partial \vec{V}}{\partial t} + (\vec{V} \cdot \nabla) \vec{V} \right] = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

$$\rho \frac{D\vec{V}}{Dt} = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

9-24

9-4 Conservation of Linear Momentum (4)

- Unfortunately, this equation is not very useful
 - 10 unknowns
 - Stress tensor, σ_{ij} : 6 independent components
 - Density ρ
 - Velocity, $\vec{V}$: 3 independent components
 - 4 equations (continuity + momentum)
 - 6 more equations required to close problem!

9-25

9-5 Navier-Stokes Equation (1)


- First step is to separate σ_{ij} into pressure and viscous stresses

$$\sigma_{ij} = \begin{pmatrix} \sigma_{xx} & \sigma_{xy} & \sigma_{xz} \\ \sigma_{yx} & \sigma_{yy} & \sigma_{yz} \\ \sigma_{zx} & \sigma_{zy} & \sigma_{zz} \end{pmatrix} = \begin{pmatrix} -p & 0 & 0 \\ 0 & -p & 0 \\ 0 & 0 & -p \end{pmatrix} + \underbrace{\begin{pmatrix} \tau_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{yx} & \tau_{yy} & \tau_{yz} \\ \tau_{zx} & \tau_{zy} & \tau_{zz} \end{pmatrix}}_{\text{Viscous (Deviatoric) Stress Tensor}}$$

- Situation not yet improved

- 6 unknowns in $\sigma_{ij} \Rightarrow$ 6 unknowns in $\tau_{ij} + 1$ in P ,
which means that we've added 1!

9-5 Navier-Stokes Equation (2)

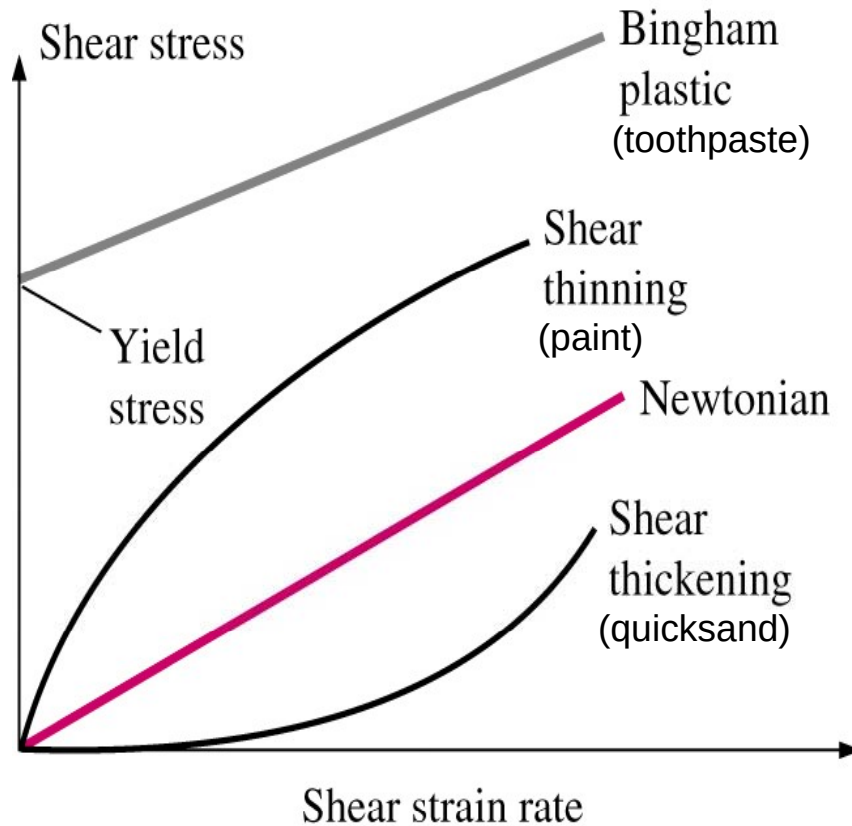

Newtonian fluid includes most common fluids: air, other gases, water, gasoline

- Reduction in the number of variables is achieved by relating shear stress to strain-rate tensor.
- For Newtonian fluid with constant properties

$$\tau_{ij} = 2\mu\epsilon_{ij}$$

Newtonian closure is analogous to Hooke's Law for elastic solids

9-27

9-5 Navier-Stokes Equation (3)

- Substituting Newtonian closure into stress tensor gives

$$\sigma_{ij} = p\delta_{ij} + 2\mu\epsilon_{ij}$$

- Using the definition of ϵ_{ij} (Chapter 4)

$$\sigma_{ij} = \begin{pmatrix} -p & 0 & 0 \\ 0 & -p & 0 \\ 0 & 0 & -p \end{pmatrix} + \begin{pmatrix} 2\mu \frac{\partial U}{\partial x} & \mu \left(\frac{\partial U}{\partial y} + \frac{\partial V}{\partial x} \right) & \mu \left(\frac{\partial U}{\partial z} + \frac{\partial W}{\partial x} \right) \\ \mu \left(\frac{\partial V}{\partial x} + \frac{\partial U}{\partial y} \right) & 2\mu \frac{\partial V}{\partial y} & \mu \left(\frac{\partial V}{\partial z} + \frac{\partial W}{\partial y} \right) \\ \mu \left(\frac{\partial W}{\partial x} + \frac{\partial U}{\partial z} \right) & \mu \left(\frac{\partial W}{\partial y} + \frac{\partial V}{\partial z} \right) & 2\mu \frac{\partial W}{\partial z} \end{pmatrix}$$

9-28

9-5 Navier-Stokes Equation (4)

- Substituting σ_{ij} into Cauchy's equation gives the Navier-Stokes equations

$$\rho \frac{D\vec{V}}{Dt} = -\nabla p + \rho \vec{g} + \mu \nabla^2 \vec{V}$$
$$\nabla \cdot \vec{V} = 0$$

Incompressible NSE
written in vector form

- This results in a *closed* system of equations!
 - 4 equations (continuity and momentum equations)
 - 4 unknowns (U, V, W, p)

9-5 Navier-Stokes Equation (5)

- In addition to vector form, incompressible N-S equation can be written in several other forms
 - Cartesian coordinates
 - Cylindrical coordinates
 - Tensor notation

9-5 Navier-Stokes Equation (6)

Cartesian Coordinates

Continuity
$$\frac{\partial U}{\partial x} + \frac{\partial V}{\partial y} + \frac{\partial W}{\partial z} = 0$$

X-momentum

$$\rho \left(\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + V \frac{\partial U}{\partial y} + W \frac{\partial U}{\partial z} \right) = -\frac{\partial P}{\partial x} + \rho g_x + \mu \left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right)$$

Y-momentum

$$\rho \left(\frac{\partial V}{\partial t} + U \frac{\partial V}{\partial x} + V \frac{\partial V}{\partial y} + W \frac{\partial V}{\partial z} \right) = -\frac{\partial P}{\partial y} + \rho g_y + \mu \left(\frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} \right)$$

Z-momentum

$$\rho \left(\frac{\partial W}{\partial t} + U \frac{\partial W}{\partial x} + V \frac{\partial W}{\partial y} + W \frac{\partial W}{\partial z} \right) = -\frac{\partial P}{\partial z} + \rho g_z + \mu \left(\frac{\partial^2 W}{\partial x^2} + \frac{\partial^2 W}{\partial y^2} + \frac{\partial^2 W}{\partial z^2} \right)$$

See page 431 for equations in cylindrical coordinates

9-31

9-5 Navier-Stokes Equation (7)

Tensor and Vector notation offer a more compact form of the equations.

Continuity

Tensor notation

$$\frac{\partial U_i}{\partial x_i} = 0$$

Vector notation

$$\nabla \cdot \vec{V} = 0$$

Conservation of Momentum

Tensor notation

$$\rho \left(\frac{\partial U_i}{\partial t} + U_j \frac{\partial U_i}{\partial x_j} \right) = -\frac{\partial P}{\partial x_i} + \rho g_{x_i} + \mu \left(\frac{\partial^2 U_i}{\partial x_j \partial x_j} \right)$$

Vector notation

$$\rho \frac{D\vec{V}}{Dt} = -\nabla p + \rho \vec{g} + \mu \nabla^2 \vec{V}$$

Repeated indices are summed over j
($x_1 = x, x_2 = y, x_3 = z, U_1 = U, U_2 = V, U_3 = W$)

9-32

9-6 Differential Analysis of Fluid Flow Problems (1)

- Now that we have a set of governing partial differential equations, there are 2 problems we can solve
 1. Calculate pressure (P) for a known velocity field
 2. Calculate velocity (U, V, W) and pressure (P) for known geometry, boundary conditions (BC), and initial conditions (IC)

9-6 Differential Analysis of Fluid Flow Problems (2)

Exact Solutions of the NSE

- There are about 80 known exact solutions to the NSE
- They can be classified as:
 - Linear solutions where the convective $(\vec{v} \cdot \nabla) \vec{v}$ term is zero
 - Nonlinear solutions where convective term is not zero
- Solutions can also be classified by type or geometry
 1. Couette shear flows
 2. Steady duct/pipe flows
 3. Unsteady duct/pipe flows
 4. Flows with moving boundaries
 5. Similarity solutions
 6. Asymptotic suction flows
 7. Wind-driven Ekman flows

9-34

9-6 Differential Analysis of Fluid Flow Problems (3)

Procedure for solving continuity and NSE

1. Set up the problem and geometry, identifying all relevant dimensions and parameters
2. List all appropriate assumptions, approximations, simplifications, and boundary conditions
3. Simplify the differential equations as much as possible
4. Integrate the equations
5. Apply BC to solve for constants of integration
6. Verify results

9-35


9-6 Differential Analysis of Fluid Flow Problems (4)

- Boundary conditions are critical to exact, approximate, and computational solutions.
- Discussed in Chapters 9 & 15
 - BC's used in analytical solutions are discussed here
 - No-slip boundary condition
 - Interface boundary condition
 - These are used in CFD as well, plus there are some BC's which arise due to specific issues in CFD modeling. These will be presented in Chap. 15.
 - Inflow and outflow boundary conditions
 - Symmetry and periodic boundary conditions

9-36

9-6 Differential Analysis of Fluid Flow Problems (5)


No-slip boundary condition

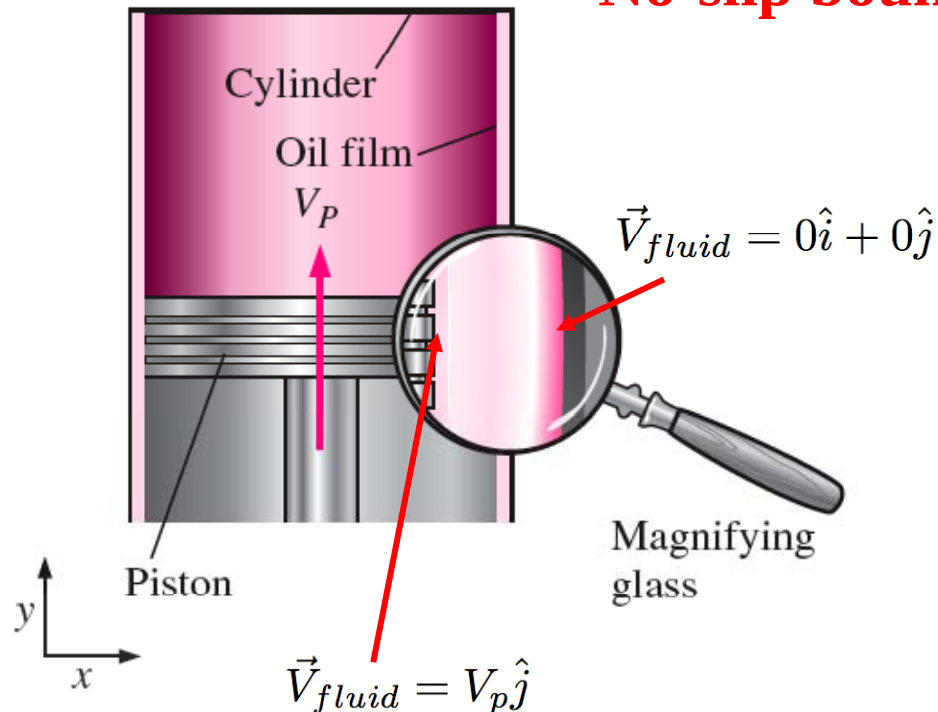

- For a fluid in contact with a solid wall, the velocity of the fluid must equal that of the wall
$$\vec{V}_{fluid} = \vec{V}_{wall}$$

9-6 Differential Analysis of Fluid Flow Problems (6)

Interface boundary condition

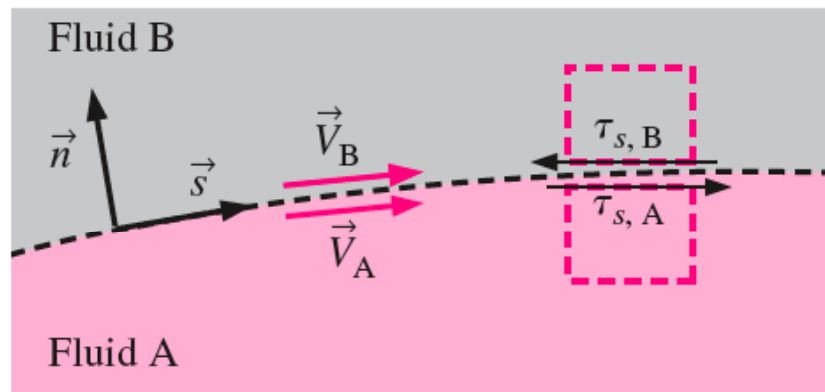

- When two fluids meet at an interface, the velocity and shear stress must be the same on both sides

$$\vec{V}_A = \vec{V}_B \quad \tau_{s,A} = \tau_{s,B}$$

- If surface tension effects are negligible and the surface is nearly flat


$$P_A = P_B$$

9-6 Differential Analysis of Fluid Flow Problems (7)

- Degenerate case of the interface BC occurs at the free surface of a liquid.

- Same conditions hold $u_{air} = u_{water}$

$$\tau_{s,water} = \mu_{water} \left(\frac{\partial u}{\partial y} \right)_{water} = \tau_{s,air} = \mu_{air} \left(\frac{\partial u}{\partial y} \right)_{air}$$

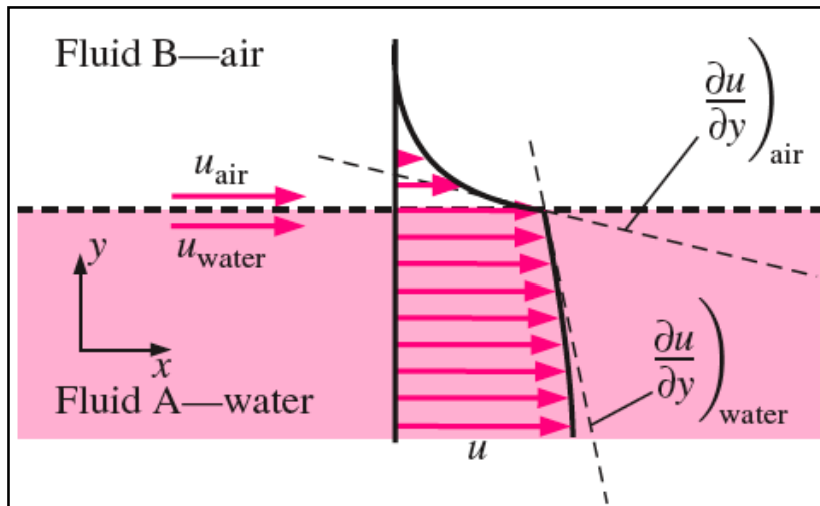

- Since $\mu_{air} \ll \mu_{water}$,

$$\left(\frac{\partial u}{\partial y} \right)_{water} \approx 0$$


- As with general interfaces, if surface tension effects are negligible and the surface is nearly flat $P_{water} = P_{air}$

9-39

9-6 Differential Analysis of Fluid Flow Problems (8)

Example: Fully Developed Couette Flow (Ex. 9-15)

- For the given geometry and BC's, calculate the velocity and pressure fields, and estimate the shear force per unit area acting on the bottom plate
- Step 1: Geometry, dimensions, and properties

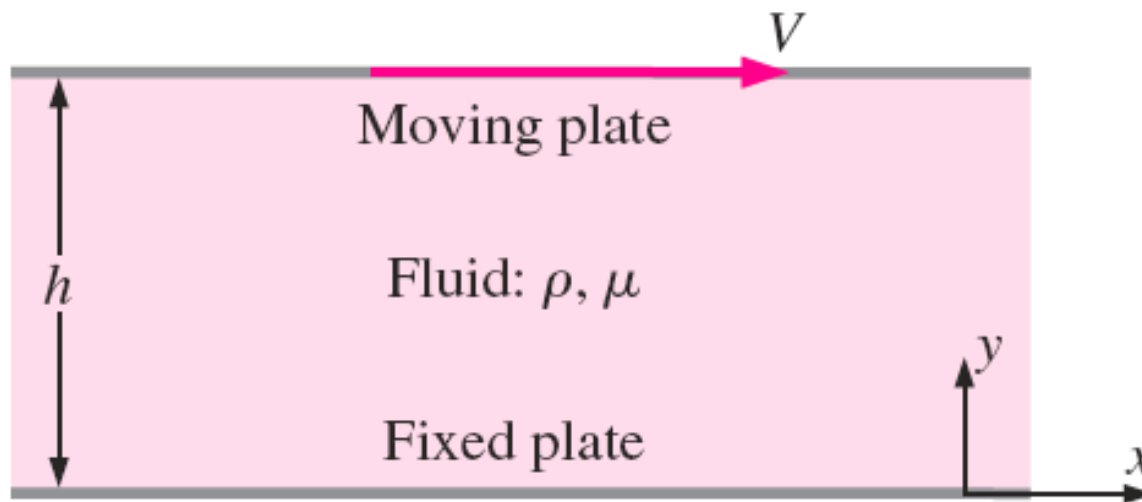

9-40

9-6 Differential Analysis of Fluid Flow Problems (9)

■ Step 2: Assumptions and BC's

■ Assumptions

1. Plates are infinite in x and z
2. Flow is steady, $\partial/\partial t = 0$
3. Parallel flow, $V=0$
4. Incompressible, Newtonian, laminar, constant properties
5. No pressure gradient
6. 2D, $W=0$, $\partial/\partial z = 0$
7. Gravity acts in the -z direction, $\vec{g} = -g\vec{k}$, $g_z = -g$

■ Boundary conditions

1. Bottom plate ($y=0$) : $u=0$, $v=0$, $w=0$
2. Top plate ($y=h$) : $u=V$, $v=0$, $w=0$

9-41

9-6 Differential Analysis of Fluid Flow Problems (10)

Step 3: Simplify

Note: these numbers refer to the assumptions on the previous slide

Continuity

$$\frac{\partial U}{\partial x} + \cancel{\frac{\partial V}{\partial y}} + \cancel{\frac{\partial W}{\partial z}} = 0$$

$$\frac{\partial U}{\partial x} = 0$$

This means the flow is “*fully developed*” or not changing in the direction of flow

X-momentum

$$\rho \left(\cancel{\frac{\partial U}{\partial t}} + U \cancel{\frac{\partial U}{\partial x}} + V \cancel{\frac{\partial U}{\partial y}} + W \cancel{\frac{\partial U}{\partial z}} \right) = -\cancel{\frac{\partial P}{\partial x}} + \rho g_x + \mu \left(\cancel{\frac{\partial^2 U}{\partial x^2}} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right)$$

$$\frac{\partial^2 U}{\partial x^2} = 0$$

9-42

9-6 Differential Analysis of Fluid Flow Problems (11)

■ Step 3: Simplify, cont.

Y-momentum

$$\rho \left(\cancel{\frac{\partial V}{\partial t}}^{2,3} + U \cancel{\frac{\partial V}{\partial x}}^3 + V \cancel{\frac{\partial V}{\partial y}}^3 + W \cancel{\frac{\partial V}{\partial z}}^{3,6} \right) = - \cancel{\frac{\partial P}{\partial y}}^7 + \cancel{\rho g_y}^3 + \mu \left(\cancel{\frac{\partial^2 V}{\partial x^2}}^3 + \cancel{\frac{\partial^2 V}{\partial y^2}}^3 + \cancel{\frac{\partial^2 V}{\partial z^2}}^3 \right)$$

$$\frac{\partial p}{\partial y} = 0 \longrightarrow p = p(z)$$

Z-momentum

$$\rho \left(\cancel{\frac{\partial W}{\partial t}}^{2,6} + U \cancel{\frac{\partial W}{\partial x}}^6 + V \cancel{\frac{\partial W}{\partial y}}^6 + W \cancel{\frac{\partial W}{\partial z}}^6 \right) = - \cancel{\frac{\partial P}{\partial z}}^7 + \rho g_z + \mu \left(\cancel{\frac{\partial^2 W}{\partial x^2}}^6 + \cancel{\frac{\partial^2 W}{\partial y^2}}^6 + \cancel{\frac{\partial^2 W}{\partial z^2}}^6 \right)$$

$$\frac{\partial p}{\partial z} = \rho g_z \longrightarrow \frac{dp}{dz} = -\rho g$$

9-43

9-6 Differential Analysis of Fluid Flow Problems (12)

■ Step 4: Integrate

X-momentum

$$\frac{d^2 u}{dy^2} = 0 \xrightarrow{\text{integrate}} \frac{du}{dy} = C_1 \xrightarrow{\text{integrate}} u(y) = C_1 y + C_2$$

Z-momentum

$$\frac{dp}{dz} = -\rho g \xrightarrow{\text{integrate}} p = -\rho g z + C_3$$

9-6 Differential Analysis of Fluid Flow Problems (13)


■ Step 5: Apply BC's

■ $y=0, u=0=C_1(0) + C_2 \Rightarrow \underline{C_2=0}$

■ $y=h, u=V=C_1h \Rightarrow \underline{C_1=V/h}$

■ This gives

$$u(y) = V \frac{y}{h}$$

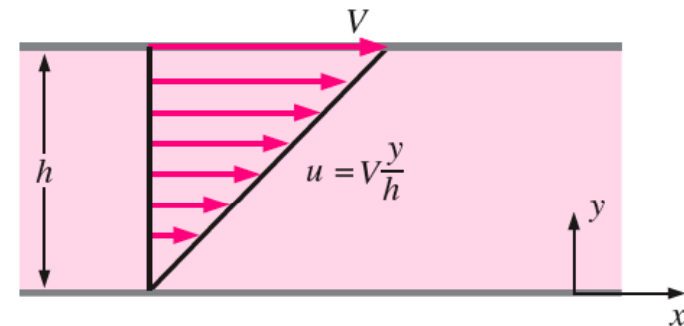

■ For pressure, no explicit BC, therefore C_3 can remain an arbitrary constant (recall only ∇P appears in NSE).

- Let $p = p_0$ at $z = 0$ (C_3 renamed p_0)

$$p(z) = p_0 - \rho g z$$

1. Hydrostatic pressure
2. Pressure acts independently of flow

9-45

9-6 Differential Analysis of Fluid Flow Problems (14)

- Step 6: Verify solution by back-substituting into differential equations

- Given the solution $(u,v,w)=(Vy/h, 0, 0)$

$$\frac{\partial u}{\partial x} = 0, \frac{\partial v}{\partial y} = 0, \frac{\partial w}{\partial z} = 0$$

- Continuity is satisfied

$$0 + 0 + 0 = 0$$

- X-momentum is satisfied


$$\begin{aligned} \rho \left(\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + V \frac{\partial U}{\partial y} + W \frac{\partial U}{\partial z} \right) &= -\frac{\partial P}{\partial x} + \rho g_x + \mu \left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right) \\ \rho \left(0 + V \frac{y}{h} \cdot 0 + 0 \cdot V/h + 0 \cdot 0 \right) &= -0 + \rho \cdot 0 + \mu (0 + 0 + 0) \\ 0 &= 0 \end{aligned}$$

9-46

9-6 Differential Analysis of Fluid Flow Problems (15)

- Finally, calculate shear force on bottom plate

$$\tau_{ij} = \begin{pmatrix} 2\mu \frac{\partial U}{\partial x} & \mu \left(\frac{\partial U}{\partial y} + \frac{\partial V}{\partial x} \right) & \mu \left(\frac{\partial U}{\partial z} + \frac{\partial W}{\partial x} \right) \\ \mu \left(\frac{\partial V}{\partial x} + \frac{\partial U}{\partial y} \right) & 2\mu \frac{\partial V}{\partial y} & \mu \left(\frac{\partial V}{\partial z} + \frac{\partial W}{\partial y} \right) \\ \mu \left(\frac{\partial W}{\partial x} + \frac{\partial U}{\partial z} \right) & \mu \left(\frac{\partial W}{\partial y} + \frac{\partial V}{\partial z} \right) & 2\mu \frac{\partial W}{\partial z} \end{pmatrix} = \begin{pmatrix} 0 & \mu \frac{V}{h} & 0 \\ \mu \frac{V}{h} & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

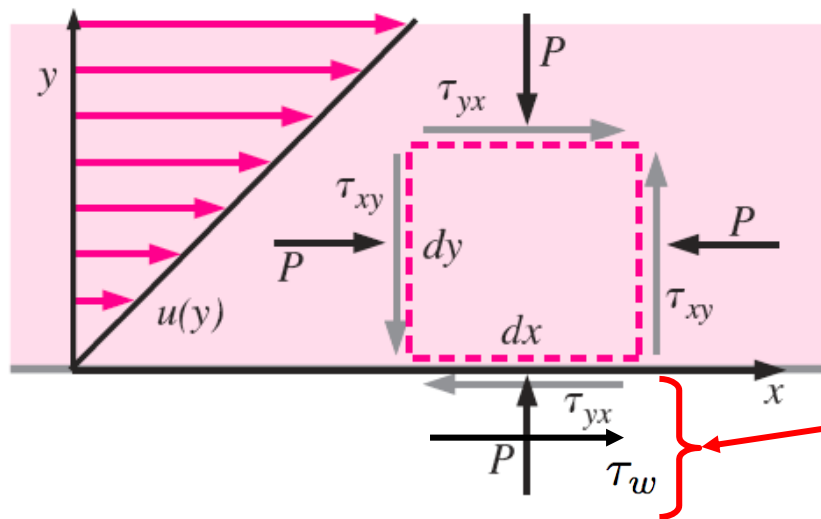

Shear force per unit area acting on the wall

$$\frac{\vec{F}}{A} = \tau_w = \mu \frac{V}{h} \hat{i}$$

Note that τ_w is equal and opposite to the shear stress acting on the fluid τ_{yx} (Newton's third law).

9-47

9-6 Differential Analysis of Fluid Flow Problems (16)

Computational Fluid Dynamics (CFD): Example 1

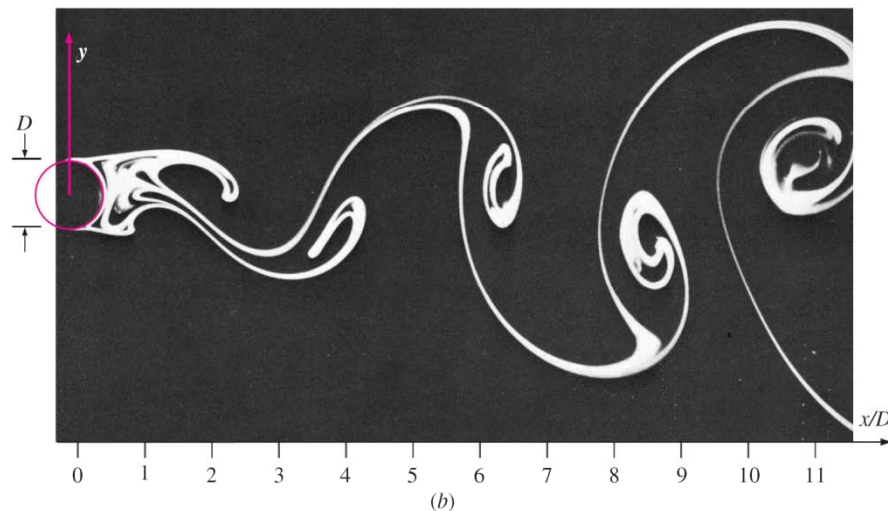
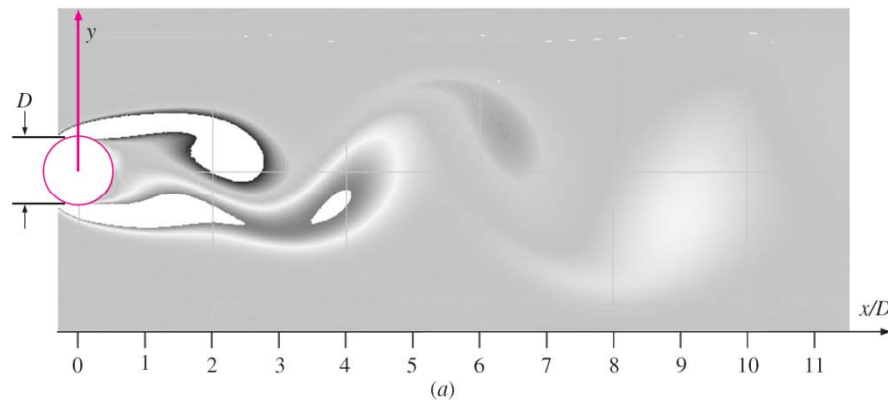


FIGURE 15-40

Close-up view of vortices shedding from a circular cylinder:
(a) instantaneous vorticity contour plot produced by CFD at $Re = 150$, and (b) dye streaklines produced by dye introduced at the cylinder surface at $Re = 140$. An animated version of this CFD picture is available on the book's website.

Photo (b) reprinted by permission of Sadatoshi Taneda.

9-48

9-6 Differential Analysis of Fluid Flow Problems (17)

Computational Fluid Dynamics (CFD): Example 2



FIGURE 15-1



CFD calculations of the ascent of the space shuttle launch vehicle (SSLV). The grid consists of more than 16 million points, and filled pressure contours are shown. Free-stream conditions are $Ma = 1.25$, and the angle of attack is -3.3° .

NASA/Photo by Ray J. Gomez. Used by permission.

9-49

9-6 Differential Analysis of Fluid Flow Problems (18)

Computational Fluid Dynamics (CFD): Example 3

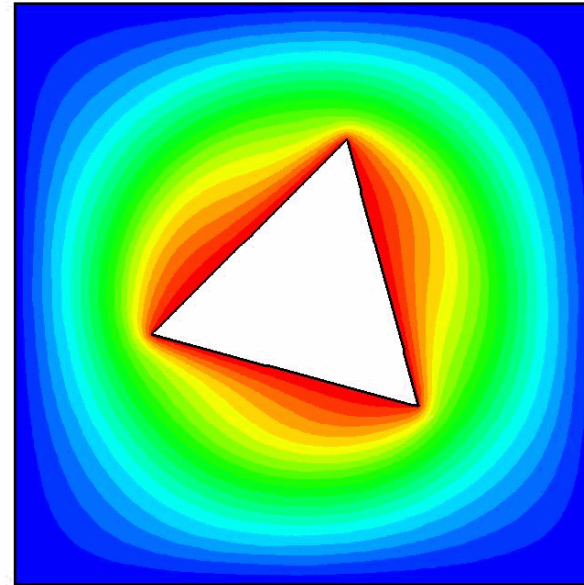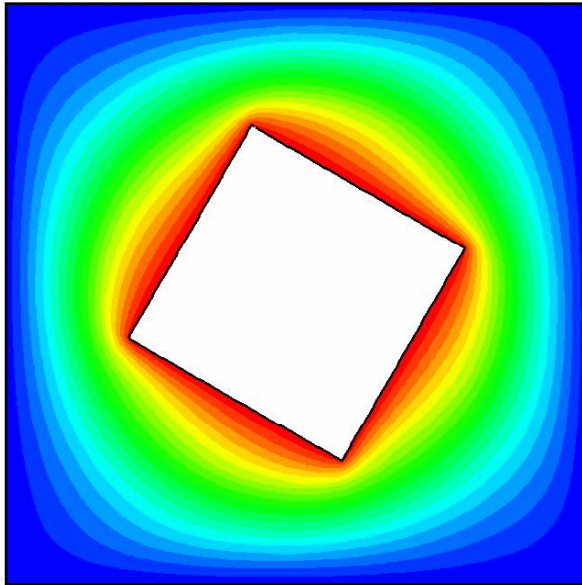

9-50