



Chapter 3: Differential Analysis of Fluid Flow



3-1 Introduction

3-2 Conservation of Mass

3-3 Conservation of Linear Momentum

3-4 Navier-Stokes Equation

3-5 Differential Analysis of Fluid Flow Problems

3-6 Example exact solution

3-7 Conservation of Energy

3-1 Introduction (1)


Objectives

- Understand how the differential equations of mass and momentum conservation are derived.
- Calculate the stream function and pressure field, and plot streamlines for a known velocity field.
- Obtain analytical solutions of the equations of motion for simple flows.

3-1 Introduction (2)

■ Recall

- Control volume (CV) versions of the laws of conservation of mass and energy
 - CV version of the conservation of momentum
- CV, or integral, forms of equations are useful for determining overall effects
- However, we cannot obtain detailed knowledge about the flow field inside the CV $\Rightarrow$ motivation for ***differential analysis***

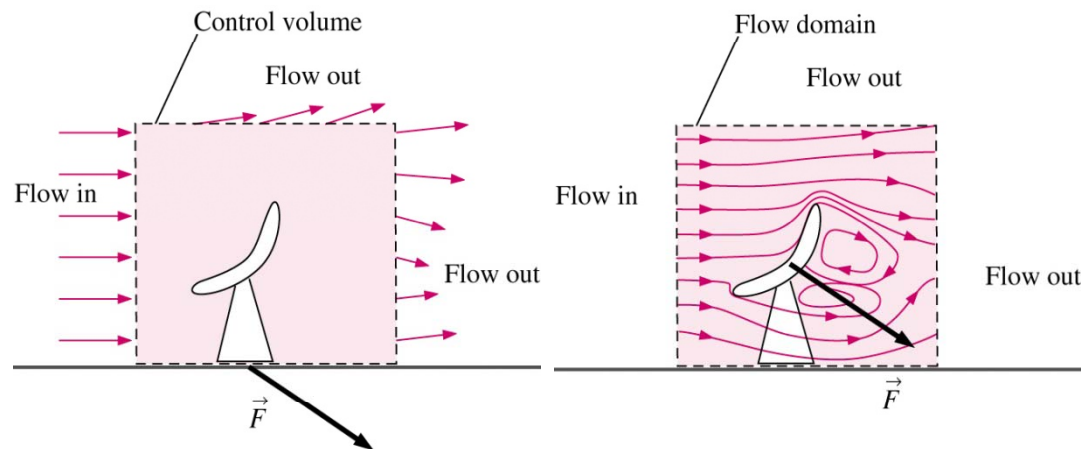

3-2

3-1 Introduction (3)

- Example: incompressible Navier-Stokes equations

$$\nabla \cdot \vec{V} = 0$$

$$\rho \frac{\partial \vec{V}}{\partial t} + \rho (\vec{V} \cdot \nabla) \vec{V} = -\nabla p + \mu \nabla^2 \vec{V} + \rho \vec{g}$$

- We will learn:
 - Physical meaning of each term
 - How to derive
 - How to solve

3-1 Introduction (4)

■ For example, how to solve?

Step	Analytical Fluid Dynamics	Computational Fluid Dynamics
1	Setup Problem and geometry, identify all dimensions and parameters	
2	List all assumptions, approximations, simplifications, boundary conditions	
3	Simplify PDE's	Build grid / discretize PDE's
4	Integrate equations	Solve algebraic system of equations including I.C.'s and B.C's
5	Apply I.C.'s and B.C.'s to solve for constants of integration	
6	Verify and plot results	Verify and plot results

3-4

3-2 Conservation of Mass (1)

- Recall CV form from Reynolds Transport Theorem (RTT)

$$0 = \int_{CV} \frac{\partial \rho}{\partial t} d\mathcal{V} + \int_{CS} \rho (\vec{V} \cdot \vec{n}) dA$$

- We'll examine two methods to derive differential form of conservation of mass
 - Divergence (Gauss's) Theorem
 - Differential CV and Taylor series expansions

3-2 Conservation of Mass (2)

Divergence Theorem

- Divergence theorem allows us to transform a volume integral of the divergence of a vector into an area integral over the surface that defines the volume.

$$\int_V \nabla \cdot \vec{G} dV = \oint_A \vec{G} \cdot \vec{n} dA$$

3-2 Conservation of Mass (3)

Divergence Theorem

- Rewrite conservation of momentum

$$\int_V \frac{\partial \rho}{\partial t} dV + \oint_A \rho (\vec{V} \cdot \vec{n}) dA = 0$$

- Using divergence theorem, replace area integral with volume integral and collect terms

$$\int_V \frac{\partial \rho}{\partial t} dV + \int_V \nabla \cdot \rho \vec{V} dV = 0 \quad \Longrightarrow \quad \int_V \left[\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{V}) \right] dV = 0$$

- Integral holds for ANY CV, therefore:


$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{V}) = 0$$

3-7

3-2 Conservation of Mass (4)

Differential CV and Taylor series

- First, define an infinitesimal control volume $dx \times dy \times dz$
- Next, we approximate the mass flow rate into or out of each of the 6 faces using Taylor series expansions around the center point, e.g., at the right face

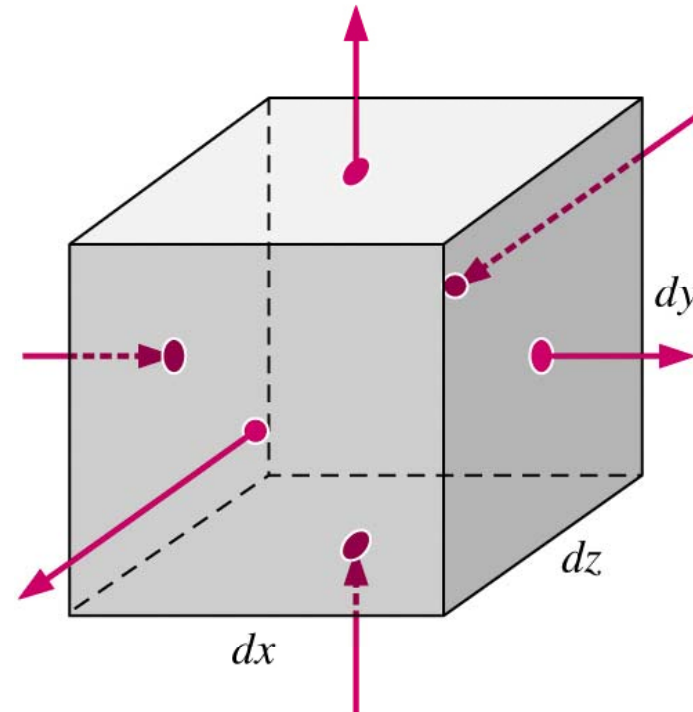


Ignore terms higher than order dx

$$(\rho u)_{\text{center of right face}} = \rho u + \frac{\partial (\rho u)}{\partial x} \frac{dx}{2} + \frac{1}{2!} \frac{\partial^2 (\rho u)}{\partial x^2} \left(\frac{dx}{2} \right)^2 + \dots$$

3-8

3-2 Conservation of Mass (5)

Differential CV and Taylor series

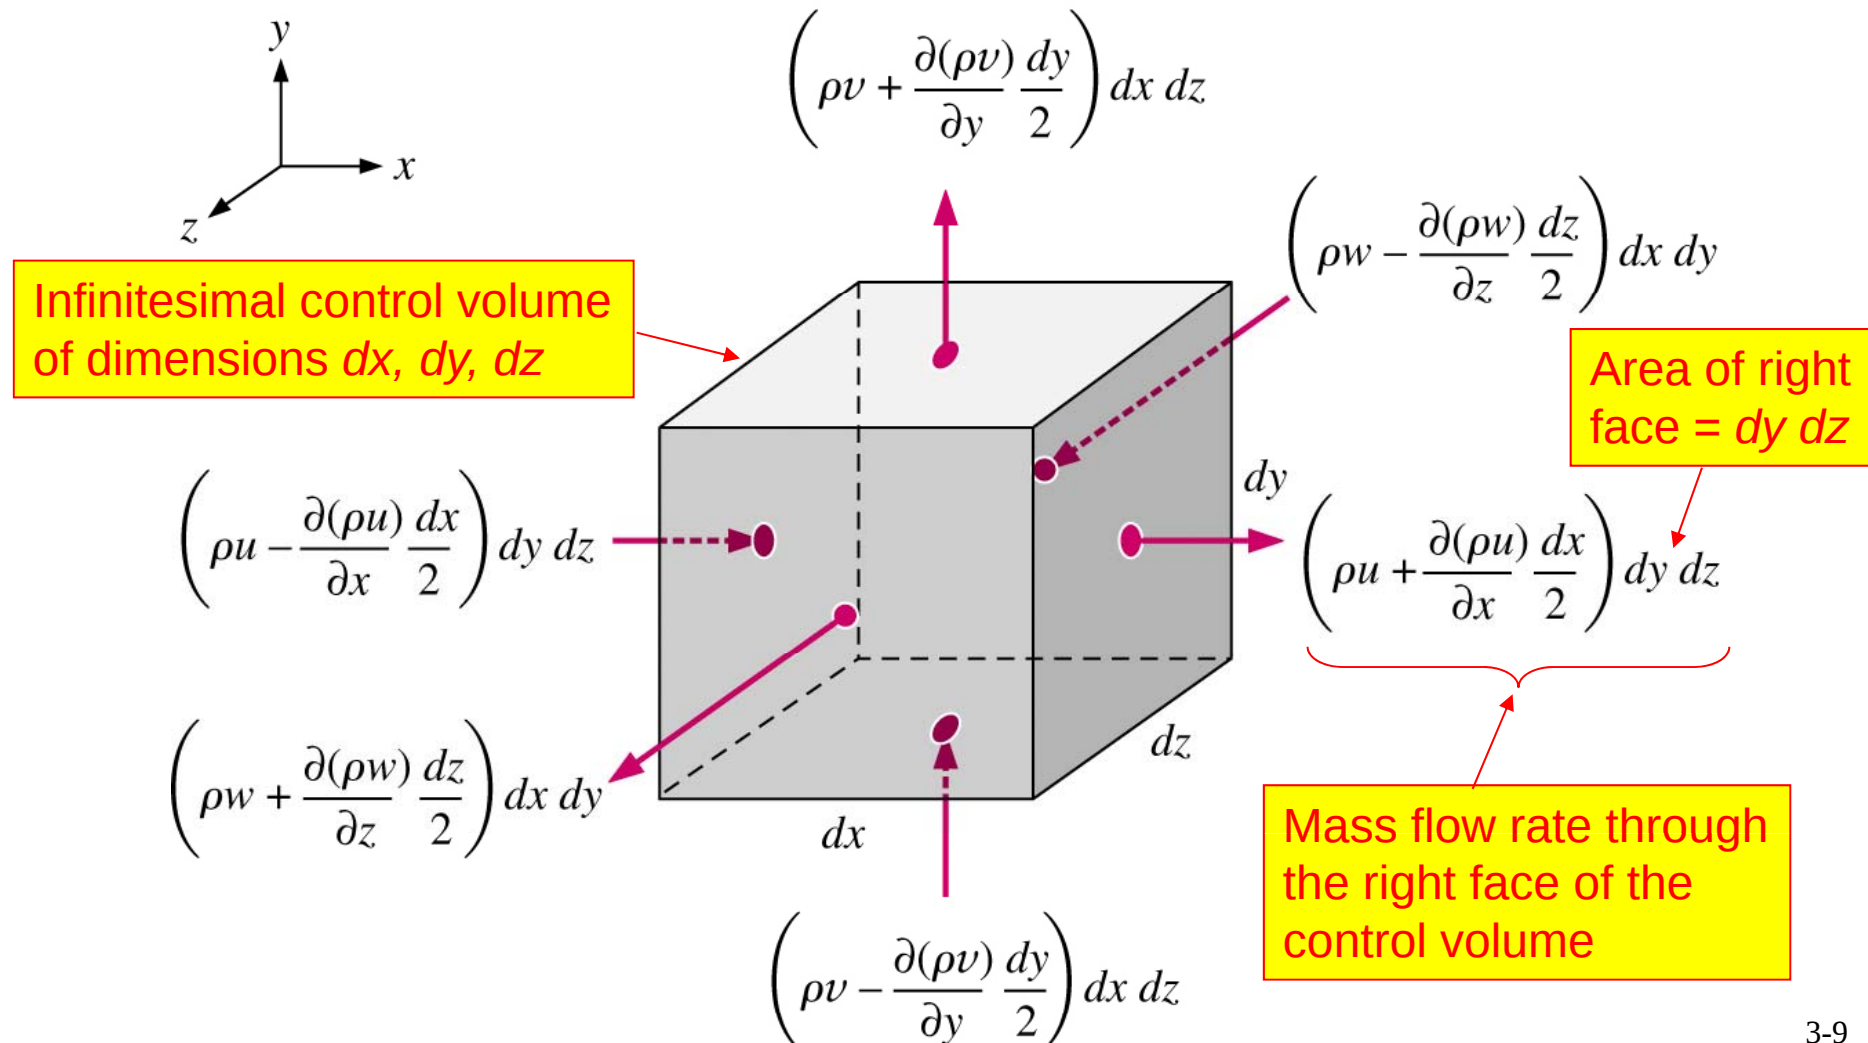

3-9

3-2 Conservation of Mass (6)

Differential CV and Taylor series

- Now, sum up the mass flow rates into and out of the 6 faces of the CV

Net mass flow rate into CV:

$$\sum_{in} \dot{m} \approx \left(\rho u - \frac{\partial(\rho u)}{\partial x} \frac{dx}{2} \right) dy dz + \left(\rho v - \frac{\partial(\rho v)}{\partial y} \frac{dy}{2} \right) dx dz + \left(\rho w - \frac{\partial(\rho w)}{\partial z} \frac{dz}{2} \right) dx dy$$

Net mass flow rate out of CV:

$$\sum_{out} \dot{m} \approx \left(\rho u + \frac{\partial(\rho u)}{\partial x} \frac{dx}{2} \right) dy dz + \left(\rho v + \frac{\partial(\rho v)}{\partial y} \frac{dy}{2} \right) dx dz + \left(\rho w + \frac{\partial(\rho w)}{\partial z} \frac{dz}{2} \right) dx dy$$

- Plug into integral conservation of mass equation

$$\int_{CV} \frac{\partial \rho}{\partial t} dV = \sum_{in} \dot{m} - \sum_{out} \dot{m}$$

3-10

3-2 Conservation of Mass (7)

Differential CV and Taylor series

■ After substitution,

$$\frac{\partial \rho}{\partial t} dx dy dz = -\frac{\partial(\rho u)}{\partial x} dx dy dz - \frac{\partial(\rho v)}{\partial y} dx dy dz - \frac{\partial(\rho w)}{\partial z} dx dy dz$$

■ Dividing through by volume $dx dy dz$

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial y} + \frac{\partial(\rho w)}{\partial z} = 0$$

Or, if we apply the definition of the divergence of a vector

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

3-11

3-2 Conservation of Mass (8)

Alternative form

- Use product rule on divergence term

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = \frac{\partial \rho}{\partial t} + \vec{V} \cdot \nabla \rho + \rho \nabla \cdot \vec{V} = 0$$



$$\frac{D\rho}{Dt} + \rho \nabla \cdot \vec{V} = 0$$

$$\frac{1}{\rho} \frac{D\rho}{Dt} + \nabla \cdot \vec{V} = 0$$

3-2 Conservation of Mass (9)

Cylindrical coordinates

- There are many problems which are simpler to solve if the equations are written in cylindrical-polar coordinates
- Easiest way to convert from Cartesian is to use vector form and definition of divergence operator in cylindrical coordinates

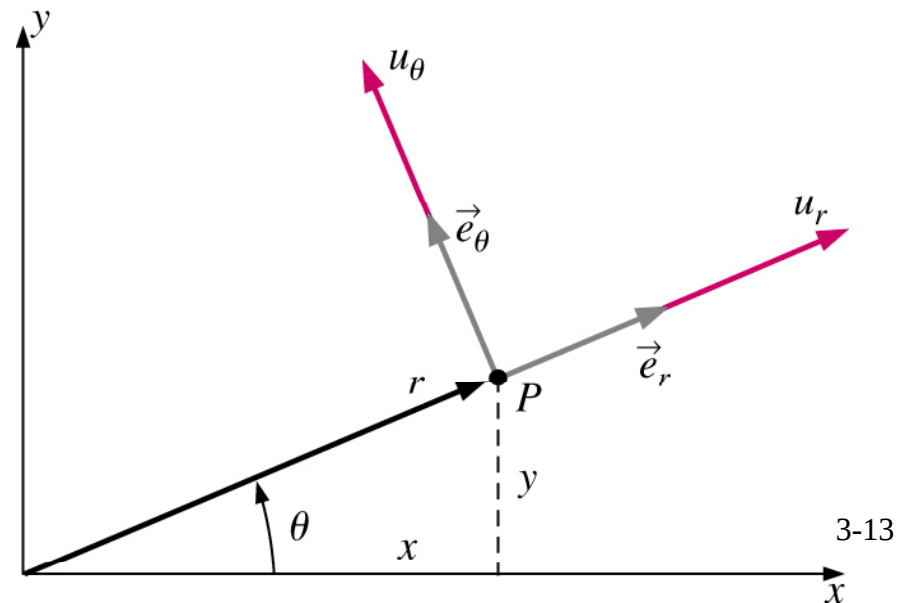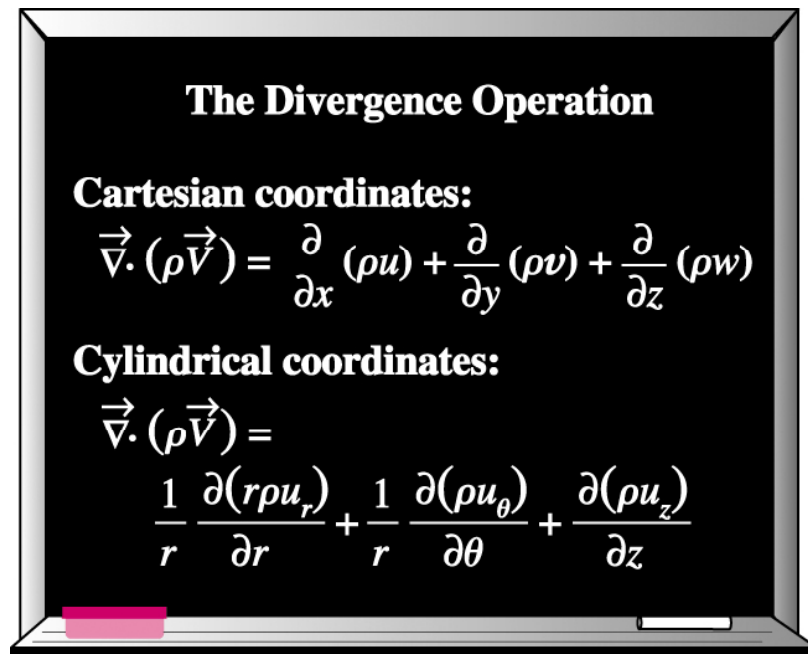

3-2 Conservation of Mass (10)

Cylindrical coordinates

$$\vec{\nabla} = \frac{1}{r} \frac{\partial(r)}{\partial r} \hat{e}_r + \frac{1}{r} \frac{\partial}{\partial \theta} \hat{e}_\theta + \frac{\partial}{\partial z} \hat{e}_z$$

$$\vec{V} = U_r \hat{e}_r + U_\theta \hat{e}_\theta + U_z \hat{e}_z$$

$$\frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

$$\frac{\partial \rho}{\partial t} + \frac{1}{r} \frac{\partial(r \rho U_r)}{\partial r} + \frac{1}{r} \frac{\partial(\rho U_\theta)}{\partial \theta} + \frac{\partial(\rho U_z)}{\partial z} = 0$$

3-14

3-2 Conservation of Mass (11)

Special Cases

- Steady compressible flow

$$\cancel{\frac{\partial \rho}{\partial t}} + \vec{\nabla} \cdot (\rho \vec{V}) = 0$$

$$\vec{\nabla} \cdot (\rho \vec{V}) = 0$$

Cartesian

$$\frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial y} + \frac{\partial(\rho w)}{\partial z} = 0$$

Cylindrical

$$\frac{\partial \rho}{\partial t} + \frac{1}{r} \frac{\partial(r \rho U_r)}{\partial r} + \frac{1}{r} \frac{\partial(\rho U_\theta)}{\partial \theta} + \frac{\partial(\rho U_z)}{\partial z} = 0$$

3-15

3-2 Conservation of Mass (12)

Special Cases

■ Incompressible flow

$$\frac{\partial \rho}{\partial t} = 0 \quad \text{and } \rho = \text{constant}$$

$$\vec{\nabla} \cdot \vec{V} = 0$$

Cartesian

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

Cylindrical

$$\frac{1}{r} \frac{\partial(rU_r)}{\partial r} + \frac{1}{r} \frac{\partial(U_\theta)}{\partial \theta} + \frac{\partial(U_z)}{\partial z} = 0$$

3-16

3-3 Conservation of Linear Momentum (1)

■ Recall for a CV

$$\sum \vec{F} = \underbrace{\int_{CV} \rho g \, d\mathcal{V}}_{\text{Body Force}} + \underbrace{\int_{CS} \sigma_{ij} \cdot \vec{n} \, dA}_{\text{Surface Force}} = \int_{CV} \frac{\partial}{\partial t} (\rho \vec{V}) \, d\mathcal{V} + \int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} \, dA$$

σ_{ij} = stress tensor

■ Using the divergence theorem to convert area integrals

$$\int_{CS} \sigma_{ij} \cdot \vec{n} \, dA = \int_{CV} \nabla \cdot \sigma_{ij} \, d\mathcal{V}$$

$$\int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} \, dA = \int_{CV} \nabla \cdot (\rho \vec{V} \vec{V}) \, d\mathcal{V}$$

3-17

3-3 Conservation of Linear Momentum (2)

- Substituting volume integrals gives,

$$\int_{CV} \left[\frac{\partial}{\partial t} (\rho \vec{V}) + \nabla \cdot (\rho \vec{V} \vec{V}) - \rho \vec{g} - \nabla \cdot \sigma_{ij} \right] dV = 0$$

- Recognizing that this holds for any CV, the integral may be dropped

$$\frac{\partial}{\partial t} (\rho \vec{V}) + \nabla \cdot (\rho \vec{V} \vec{V}) = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

This is Cauchy's Equation

Can also be derived using infinitesimal CV and Newton's 2nd Law

3-18

3-3 Conservation of Linear Momentum (3)

- Alternate form of the Cauchy Equation can be derived by introducing

$$\frac{\partial (\rho \vec{V})}{\partial t} = \rho \frac{\partial \vec{V}}{\partial t} + \vec{V} \frac{\partial \rho}{\partial t} \quad (\text{Chain Rule})$$

$$\nabla \cdot (\rho \vec{V} \vec{V}) = \vec{V} \nabla \cdot (\rho \vec{V}) + \rho (\vec{V} \cdot \nabla) \vec{V}$$

- Inserting these into Cauchy Equation and rearranging gives

$$\rho \left[\frac{\partial \vec{V}}{\partial t} + (\vec{V} \cdot \nabla) \vec{V} \right] = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

$$\rho \frac{D\vec{V}}{Dt} = \rho \vec{g} + \nabla \cdot \sigma_{ij}$$

3-19

3-3 Conservation of Linear Momentum (4)

- Unfortunately, this equation is not very useful
 - 10 unknowns
 - Stress tensor, σ_{ij} : 6 independent components
 - Density ρ
 - Velocity, V : 3 independent components
 - 4 equations ($\vec{\text{continuity}}$ + momentum)
 - 6 more equations required to close problem!

3-4 Navier-Stokes Equation (1)


- First step is to separate σ_{ij} into pressure and viscous stresses

$$\sigma_{ij} = \begin{pmatrix} \sigma_{xx} & \sigma_{xy} & \sigma_{xz} \\ \sigma_{yx} & \sigma_{yy} & \sigma_{yz} \\ \sigma_{zx} & \sigma_{zy} & \sigma_{zz} \end{pmatrix} = \begin{pmatrix} -p & 0 & 0 \\ 0 & -p & 0 \\ 0 & 0 & -p \end{pmatrix} + \underbrace{\begin{pmatrix} \tau_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{yx} & \tau_{yy} & \tau_{yz} \\ \tau_{zx} & \tau_{zy} & \tau_{zz} \end{pmatrix}}_{\text{Viscous (Deviatoric) Stress Tensor}}$$

- Situation not yet improved

- 6 unknowns in $\sigma_{ij} \Rightarrow$ 6 unknowns in $\tau_{ij} + 1$ in P ,
which means that we've added 1!

3-4 Navier-Stokes Equation (2)

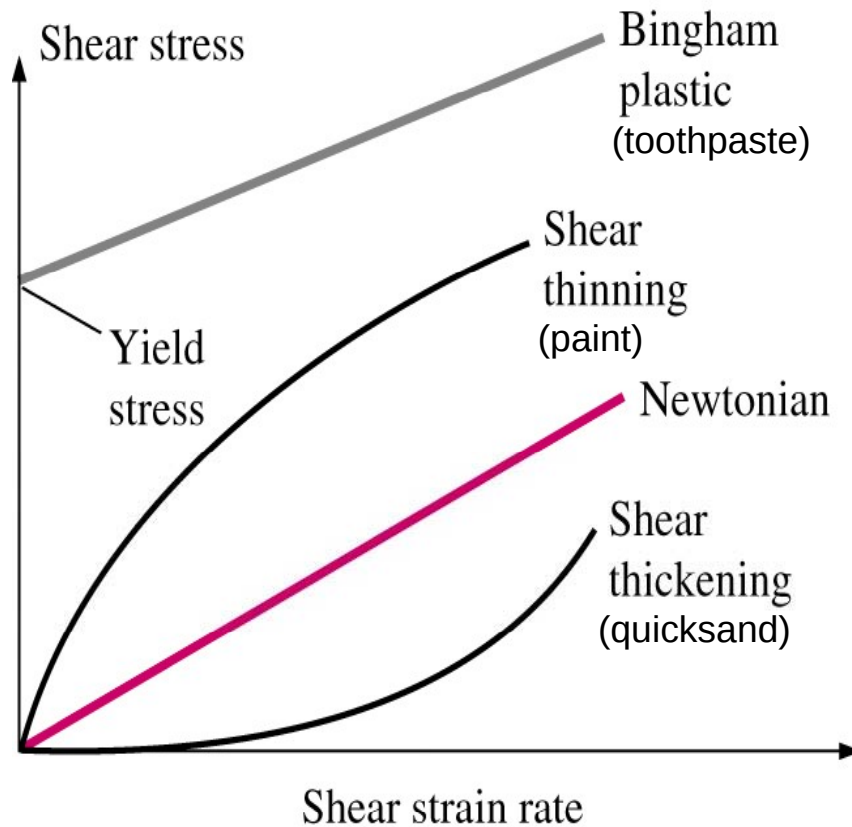

Newtonian fluid includes most common fluids: air, other gases, water, gasoline

- Reduction in the number of variables is achieved by relating shear stress to strain-rate tensor.
- For Newtonian fluid with constant properties

$$\tau_{ij} = 2\mu\epsilon_{ij}$$

Newtonian closure is analogous to Hooke's Law for elastic solids

3-22

3-4 Navier-Stokes Equation (3)

- Substituting Newtonian closure into stress tensor gives

$$\sigma_{ij} = p\delta_{ij} + 2\mu\epsilon_{ij}$$

- Using the definition of ϵ_{ij}

$$\sigma_{ij} = \begin{pmatrix} -p & 0 & 0 \\ 0 & -p & 0 \\ 0 & 0 & -p \end{pmatrix} + \begin{pmatrix} 2\mu \frac{\partial U}{\partial x} & \mu \left(\frac{\partial U}{\partial y} + \frac{\partial V}{\partial x} \right) & \mu \left(\frac{\partial U}{\partial z} + \frac{\partial W}{\partial x} \right) \\ \mu \left(\frac{\partial V}{\partial x} + \frac{\partial U}{\partial y} \right) & 2\mu \frac{\partial V}{\partial y} & \mu \left(\frac{\partial V}{\partial z} + \frac{\partial W}{\partial y} \right) \\ \mu \left(\frac{\partial W}{\partial x} + \frac{\partial U}{\partial z} \right) & \mu \left(\frac{\partial W}{\partial y} + \frac{\partial V}{\partial z} \right) & 2\mu \frac{\partial W}{\partial z} \end{pmatrix}$$

3-23

3-4 Navier-Stokes Equation (4)

- Substituting σ_{ij} into Cauchy's equation gives the Navier-Stokes equations

$$\rho \frac{D\vec{V}}{Dt} = -\nabla p + \rho \vec{g} + \mu \nabla^2 \vec{V}$$
$$\nabla \cdot \vec{V} = 0$$

Incompressible NSE
written in vector form

- This results in a *closed* system of equations!
 - 4 equations (continuity and momentum equations)
 - 4 unknowns (U, V, W, p)

3-4 Navier-Stokes Equation (5)

Cartesian Coordinates

Continuity
$$\frac{\partial U}{\partial x} + \frac{\partial V}{\partial y} + \frac{\partial W}{\partial z} = 0$$

X-momentum

$$\rho \left(\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + V \frac{\partial U}{\partial y} + W \frac{\partial U}{\partial z} \right) = -\frac{\partial P}{\partial x} + \rho g_x + \mu \left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right)$$

Y-momentum

$$\rho \left(\frac{\partial V}{\partial t} + U \frac{\partial V}{\partial x} + V \frac{\partial V}{\partial y} + W \frac{\partial V}{\partial z} \right) = -\frac{\partial P}{\partial y} + \rho g_y + \mu \left(\frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} \right)$$

Z-momentum

$$\rho \left(\frac{\partial W}{\partial t} + U \frac{\partial W}{\partial x} + V \frac{\partial W}{\partial y} + W \frac{\partial W}{\partial z} \right) = -\frac{\partial P}{\partial z} + \rho g_z + \mu \left(\frac{\partial^2 W}{\partial x^2} + \frac{\partial^2 W}{\partial y^2} + \frac{\partial^2 W}{\partial z^2} \right)$$

3-25

3-4 Navier-Stokes Equation (6)

Tensor and Vector Notation

Tensor and Vector notation offer a more compact form of the equations.

Continuity

Tensor notation

$$\frac{\partial U_i}{\partial x_i} = 0$$

Vector notation

$$\nabla \cdot \vec{V} = 0$$

Conservation of Momentum

Tensor notation

$$\rho \left(\frac{\partial U_i}{\partial t} + U_j \frac{\partial U_i}{\partial x_j} \right) = -\frac{\partial P}{\partial x_i} + \rho g_{x_i} + \mu \left(\frac{\partial^2 U_i}{\partial x_j \partial x_j} \right)$$

Vector notation

$$\rho \frac{D\vec{V}}{Dt} = -\nabla p + \rho \vec{g} + \mu \nabla^2 \vec{V}$$

Repeated indices are summed over j
($x_1 = x, x_2 = y, x_3 = z, U_1 = U, U_2 = V, U_3 = W$)

3-26

3-5 Differential Analysis of Fluid Flow Problems (1)

- Now that we have a set of governing partial differential equations, there are 2 problems we can solve
 1. Calculate pressure (P) for a known velocity field
 2. Calculate velocity (U, V, W) and pressure (P) for known geometry, boundary conditions (BC), and initial conditions (IC)

3-27

3-5 Differential Analysis of Fluid Flow Problems (2)

Exact Solutions of the NSE

- There are about 80 known exact solutions to the NSE
- They can be classified as:
 - Linear solutions where the convective term is zero
 - $(\vec{V} \cdot \nabla) \vec{V}$ solutions where convective term is not zero
- Solutions can also be classified by type or geometry
 1. Couette shear flows
 2. Steady duct/pipe flows
 3. Unsteady duct/pipe flows
 4. Flows with moving boundaries
 5. Similarity solutions
 6. Asymptotic suction flows
 7. Wind-driven Ekman flows

3-28

3-5 Differential Analysis of Fluid Flow Problems (3)

Exact Solutions of the NSE


Procedure for solving continuity and NSE

1. Set up the problem and geometry, identifying all relevant dimensions and parameters
2. List all appropriate assumptions, approximations, simplifications, and boundary conditions
3. Simplify the differential equations as much as possible
4. Integrate the equations
5. Apply BC to solve for constants of integration
6. Verify results

3-29

3-5 Differential Analysis of Fluid Flow Problems (4)

No-slip boundary condition

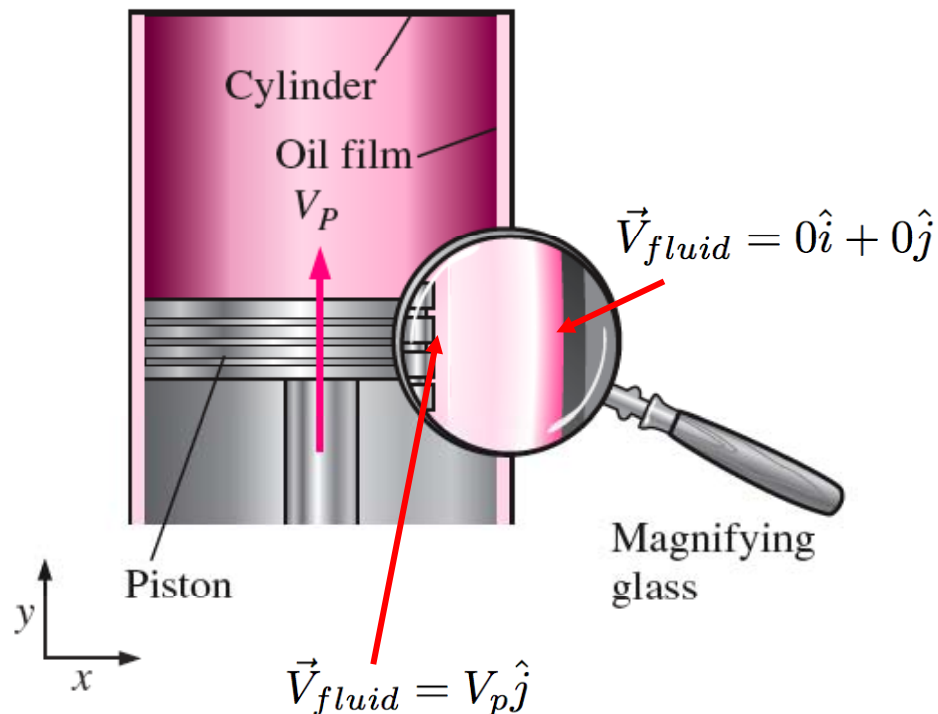


- For a fluid in contact with a solid wall, the velocity of the fluid must equal that of the wall

$$\vec{V}_{fluid} = \vec{V}_{wall}$$

3-5 Differential Analysis of Fluid Flow Problems (5)

Interface boundary condition

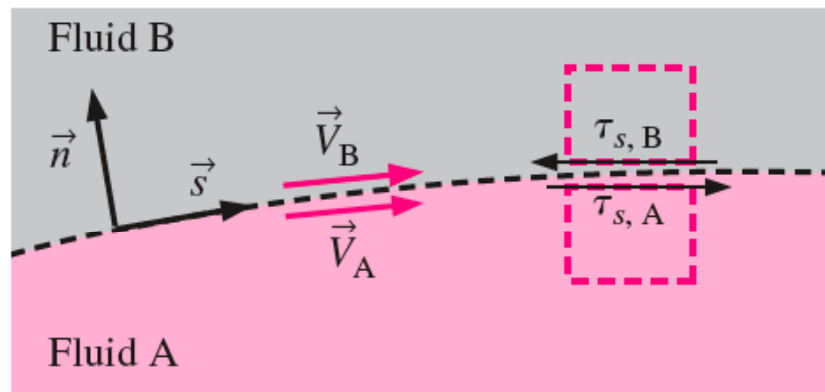

- When two fluids meet at an interface, the velocity and shear stress must be the same on both sides

$$\vec{V}_A = \vec{V}_B \quad \tau_{s,A} = \tau_{s,B}$$

- If surface tension effects are negligible and the surface is nearly flat

$$P_A = P_B$$

3-31

3-5 Differential Analysis of Fluid Flow Problems (6)


Interface boundary condition

- Degenerate case of the interface BC occurs at the free surface of a liquid.

- Same conditions hold

$$u_{air} = u_{water}$$

$$\tau_{s,water} = \mu_{water} \left(\frac{\partial u}{\partial y} \right)_{water} = \tau_{s,air} = \mu_{air} \left(\frac{\partial u}{\partial y} \right)_{air}$$

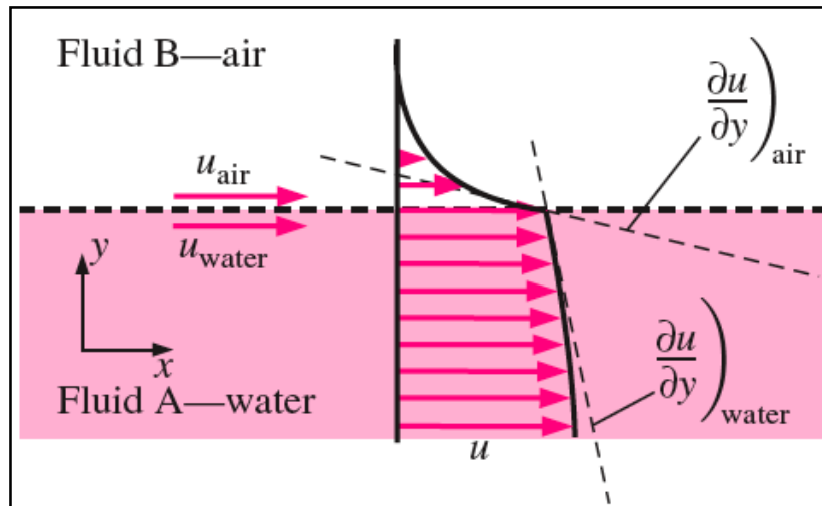

- Since $\mu_{air} \ll \mu_{water}$,

$$\left(\frac{\partial u}{\partial y} \right)_{water} \approx 0$$


- As with general interfaces, if surface tension effects are negligible and the surface is nearly flat $P_{water} = P_{air}$

3-32

3-6 Example exact solution (1)

Fully Developed Couette Flow

- For the given geometry and BC's, calculate the velocity and pressure fields, and estimate the shear force per unit area acting on the bottom plate
- Step 1: Geometry, dimensions, and properties

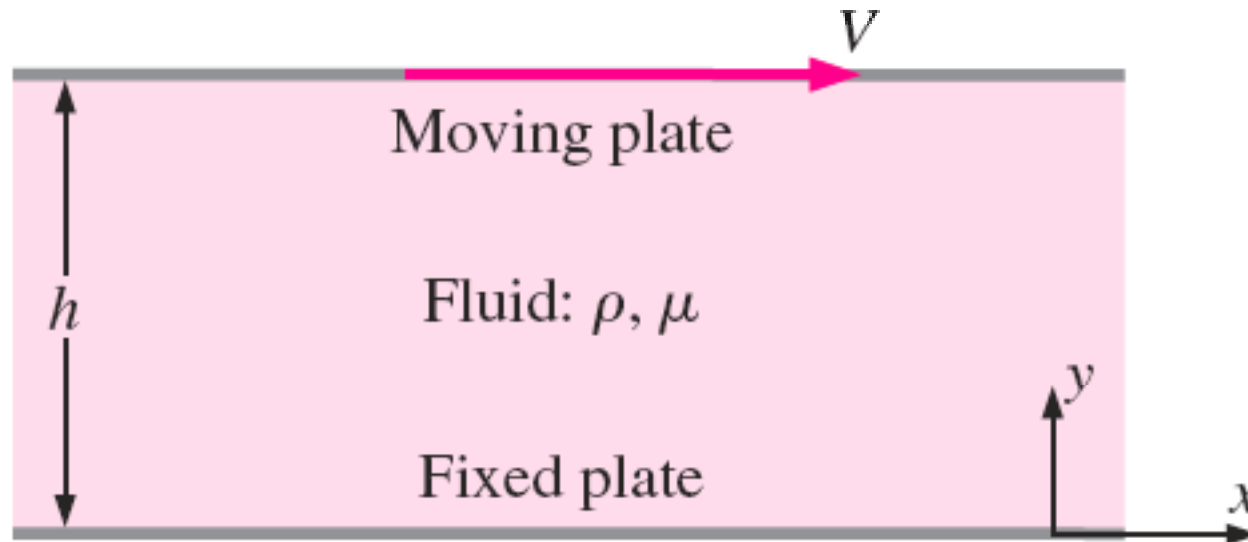

3-33

3-6 Example exact solution (2)

Fully Developed Couette Flow

■ Step 2: Assumptions and BC's

■ Assumptions

1. Plates are infinite in x and z
2. Flow is steady, $\partial/\partial t = 0$
3. Parallel flow, $V=0$
4. Incompressible, Newtonian, laminar, constant properties
5. No pressure gradient
6. 2D, $W=0$, $\partial/\partial z = 0$
7. Gravity acts in the -z direction, $\vec{g} = -g\vec{k}$, $g_z = -g$

■ Boundary conditions

1. Bottom plate ($y=0$) : $u=0$, $v=0$, $w=0$
2. Top plate ($y=h$) : $u=V$, $v=0$, $w=0$

3-34

3-6 Example exact solution (3)

Fully Developed Couette Flow

Step 3: Simplify

Continuity

$$\frac{\partial U}{\partial x} + \cancel{\frac{\partial V}{\partial y}} + \cancel{\frac{\partial W}{\partial z}} = 0$$

Note: these numbers refer to the assumptions on the previous slide

$$\frac{\partial U}{\partial x} = 0$$

This means the flow is “fully developed” or not changing in the direction of flow

X-momentum

$$\rho \left(\cancel{\frac{\partial U}{\partial t}} + U \cancel{\frac{\partial U}{\partial x}} + V \cancel{\frac{\partial U}{\partial y}} + W \cancel{\frac{\partial U}{\partial z}} \right) = -\cancel{\frac{\partial P}{\partial x}} + \rho g_x + \mu \left(\cancel{\frac{\partial^2 U}{\partial x^2}} + \frac{\partial^2 U}{\partial y^2} + \cancel{\frac{\partial^2 U}{\partial z^2}} \right)$$

$$\frac{\partial^2 U}{\partial x^2} = 0$$

3-35

3-6 Example exact solution (4)

Fully Developed Couette Flow

■ Step 3: Simplify, cont.

Y-momentum

$$\rho \left(\cancel{\frac{\partial V}{\partial t}}^{2,3} + U \cancel{\frac{\partial V}{\partial x}}^3 + V \cancel{\frac{\partial V}{\partial y}}^3 + W \cancel{\frac{\partial V}{\partial z}}^{3,6} \right) = - \cancel{\frac{\partial P}{\partial y}}^7 + \cancel{\rho g_y}^3 + \mu \left(\cancel{\frac{\partial^2 V}{\partial x^2}}^3 + \cancel{\frac{\partial^2 V}{\partial y^2}}^3 + \cancel{\frac{\partial^2 V}{\partial z^2}}^3 \right)$$

$$\frac{\partial p}{\partial y} = 0 \longrightarrow p = p(z)$$

Z-momentum

$$\rho \left(\cancel{\frac{\partial W}{\partial t}}^{2,6} + U \cancel{\frac{\partial W}{\partial x}}^6 + V \cancel{\frac{\partial W}{\partial y}}^6 + W \cancel{\frac{\partial W}{\partial z}}^6 \right) = - \cancel{\frac{\partial P}{\partial z}}^7 + \rho g_z + \mu \left(\cancel{\frac{\partial^2 W}{\partial x^2}}^6 + \cancel{\frac{\partial^2 W}{\partial y^2}}^6 + \cancel{\frac{\partial^2 W}{\partial z^2}}^6 \right)$$

$$\frac{\partial p}{\partial z} = \rho g_z \longrightarrow \frac{dp}{dz} = -\rho g$$

3-36

3-6 Example exact solution (5)

Fully Developed Couette Flow

■ Step 4: Integrate

X-momentum

$$\frac{d^2 u}{dy^2} = 0 \xrightarrow{\text{integrate}} \frac{du}{dy} = C_1 \xrightarrow{\text{integrate}} u(y) = C_1 y + C_2$$

Z-momentum

$$\frac{dp}{dz} = -\rho g \xrightarrow{\text{integrate}} p = -\rho g z + C_3$$

3-6 Example exact solution (6)

Fully Developed Couette Flow


■ Step 5: Apply BC's

■ $y=0, u=0=C_1(0) + C_2 \Rightarrow \underline{C_2=0}$

■ $y=h, u=V=C_1h \Rightarrow \underline{C_1=V/h}$

■ This gives

$$u(y) = V \frac{y}{h}$$

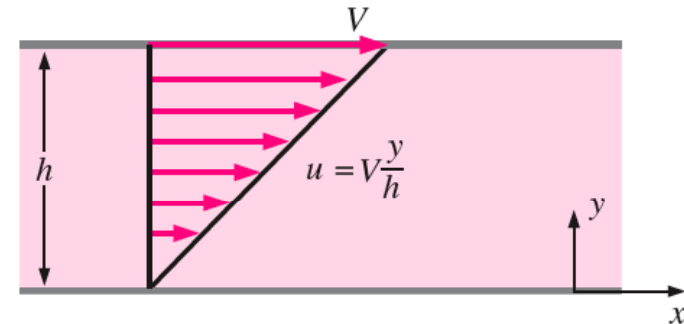

■ For pressure, no explicit BC, therefore C_3 can remain an arbitrary constant (recall only ∇P appears in NSE).

- Let $p = p_0$ at $z = 0$ (C_3 renamed p_0)

$$p(z) = p_0 - \rho g z$$

1. Hydrostatic pressure
2. Pressure acts independently of flow

3-38

3-6 Example exact solution (7)

Fully Developed Couette Flow

- Step 6: Verify solution by back-substituting into differential equations

- Given the solution $(u,v,w)=(Vy/h, 0, 0)$

$$\frac{\partial u}{\partial x} = 0, \frac{\partial v}{\partial y} = 0, \frac{\partial w}{\partial z} = 0$$

- Continuity is satisfied

$$0 + 0 + 0 = 0$$

- X-momentum is satisfied

$$\begin{aligned} \rho \left(\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + V \frac{\partial U}{\partial y} + W \frac{\partial U}{\partial z} \right) &= -\frac{\partial P}{\partial x} + \rho g_x + \mu \left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right) \\ \rho \left(0 + V \frac{y}{h} \cdot 0 + 0 \cdot V/h + 0 \cdot 0 \right) &= -0 + \rho \cdot 0 + \mu (0 + 0 + 0) \\ 0 &= 0 \end{aligned}$$


3-39

3-6 Example exact solution (8)

Fully Developed Couette Flow

- Finally, calculate shear force on bottom plate

$$\tau_{ij} = \begin{pmatrix} 2\mu \frac{\partial U}{\partial x} & \mu \left(\frac{\partial U}{\partial y} + \frac{\partial V}{\partial x} \right) & \mu \left(\frac{\partial U}{\partial z} + \frac{\partial W}{\partial x} \right) \\ \mu \left(\frac{\partial V}{\partial x} + \frac{\partial U}{\partial y} \right) & 2\mu \frac{\partial V}{\partial y} & \mu \left(\frac{\partial V}{\partial z} + \frac{\partial W}{\partial y} \right) \\ \mu \left(\frac{\partial W}{\partial x} + \frac{\partial U}{\partial z} \right) & \mu \left(\frac{\partial W}{\partial y} + \frac{\partial V}{\partial z} \right) & 2\mu \frac{\partial W}{\partial z} \end{pmatrix} = \begin{pmatrix} 0 & \mu \frac{V}{h} & 0 \\ \mu \frac{V}{h} & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

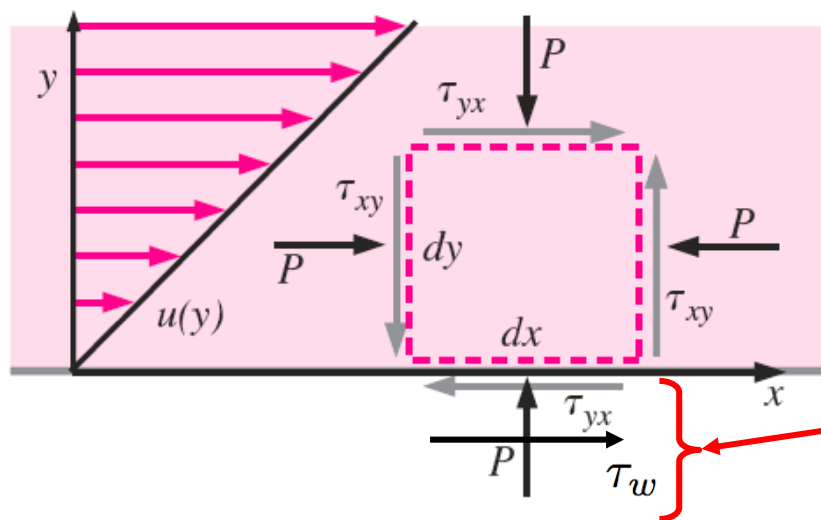

Shear force per unit area acting on the wall

$$\frac{\vec{F}}{A} = \tau_w = \mu \frac{V}{h} \hat{i}$$

Note that τ_w is equal and opposite to the shear stress acting on the fluid τ_{yx} (Newton's third law).

3-40

3.7 Conservation of Energy (1)

The Energy Equation

A		B	
Rate of change of internal and kinetic energy of element	=	Net rate of internal and kinetic energy transport by convection	+
C		D	
Net rate of heat addition by conduction	—	Net rate of work done by element on surroundin gs	

3-41

3.7 Conservation of Energy (2)

- **Continuum**
- **Newtonian**
- **Negligible nuclear, electromagnetic and radiation energy**

(1) A = Rate of change of internal and kinetic energy of element

$$A = \frac{\partial}{\partial t} \left[\rho (\hat{u} + V^2 / 2) \right] dx dy dz \quad (A-1)$$

3.7 Conservation of Energy (3)

(2) B = Net rate of internal and kinetic energy by convection

$$\mathbf{B} = - \left\{ \nabla \cdot \left[(\hat{u} + V^2 / 2) \rho \vec{V} \right] \right\} dx dy dz \quad (\text{A-2})$$

(3) C = Net rate of heat addition by conduction


- Conduction at each surface depends on temperature gradient
- Apply Fourier's law

$$C = -(\nabla \cdot \vec{q''}) dx dy dz \quad (\text{A-3})$$

3-43

3.7 Conservation of Energy (4)

(4) **D = Net rate of work done by the element on the surroundings**

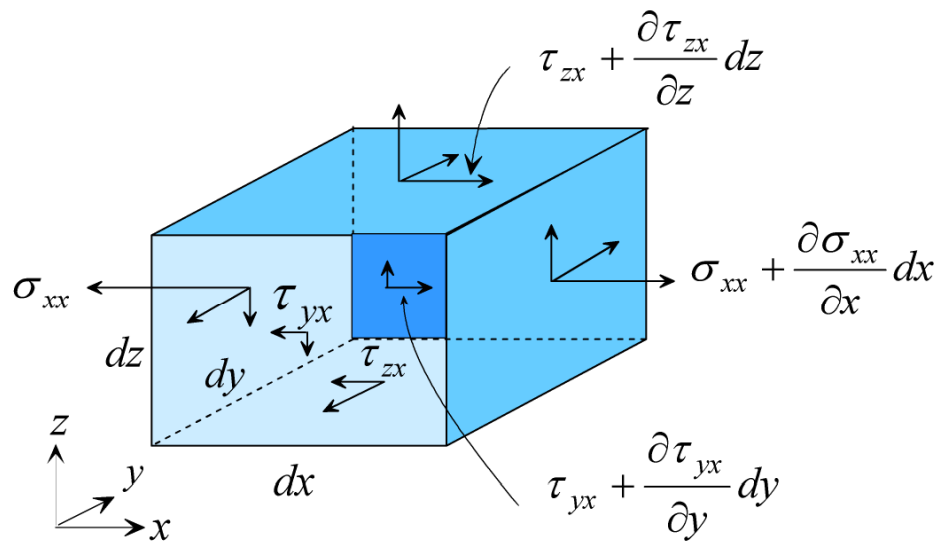

Rate of work=force x velocity

Fig. 2.6

3-44

3.7 Conservation of Energy (5)

- 18 surface forces (Fig. 2.6)
- 3 body forces (gravity)
- Total 21 forces at 21 velocities

$$D = -\rho (\vec{V} \cdot \vec{g}) dxdydz - \left[\frac{\partial}{\partial x} (u \sigma_{xx} + v \tau_{xy} + w \tau_{xz}) + \frac{\partial}{\partial y} (u \tau_{yx} + v \sigma_{yy} + w \tau_{yz}) + \frac{\partial}{\partial z} (u \tau_{zx} + v \tau_{zy} + w \sigma_{zz}) \right] dxdydz \quad (\text{A-7})$$

Substitute (A-1), (A-2), (A-3) and (A-7) into (2.14)

$$\frac{\partial}{\partial t} \left[\rho \left(\hat{u} + \frac{1}{2} V^2 \right) \right] = -\nabla \cdot \left[\left(\hat{u} + \frac{1}{2} V^2 \right) \rho \vec{V} \right] - \nabla \cdot \vec{q}'' + \rho (\vec{V} \cdot \vec{g}) + \left[\frac{\partial}{\partial x} (u \sigma_{xx} + v \tau_{xy} + w \tau_{xz}) + \frac{\partial}{\partial y} (u \tau_{yx} + v \sigma_{yy} + w \tau_{yz}) + \frac{\partial}{\partial z} (u \tau_{zx} + v \tau_{zy} + w \sigma_{zz}) \right] \quad (\text{A-8})$$

3-45

3.7 Conservation of Energy (6)

Simplify using:

- **Fourier's law**
- **Continuity equation**
- **Momentum equations**
- **Constitutive equations**
- **Thermodynamic relations for $\hat{u}$ and $\hat{h}$**

$$\rho c_p \frac{DT}{Dt} = \nabla \cdot k \nabla T + \beta T \frac{Dp}{Dt} + \mu \Phi \quad (2.15)$$

where

β = coefficient of thermal expansion (compressibility)

$$\beta = -\frac{1}{\rho} \left[\frac{\partial \rho}{\partial T} \right]_p \quad (2.16)$$

Φ = dissipation function (energy due to friction)

3-46

3.7 Conservation of Energy (7)

$$\begin{aligned}\Phi = & 2 \left[\left(\frac{\partial u}{\partial x} \right)^2 + \left(\frac{\partial v}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial z} \right)^2 \right] + \\ & \left[\left(\frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right)^2 + \left(\frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right)^2 \right] - \\ & \frac{2}{3} \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \right)^2\end{aligned}\quad (2.17)$$

- Φ is Important in high speed flow and for very viscous fluids

3.7 Conservation of Energy (8)

Simplified Form of the Energy Equation

(i) Incompressible fluid

$$\beta = 0$$

and

$$c_p = c_v = c$$

$$\rho c_p \frac{DT}{Dt} = \nabla \cdot k \nabla T + \mu \Phi \quad (2.18)$$

3.7 Conservation of Energy (9)

Simplified Form of the Energy Equation

(ii) Incompressible constant conductivity fluid

$$\rho c_P \left(\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} + w \frac{\partial T}{\partial z} \right) = k \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} \right) + \mu \Phi \quad (2.19b)$$

or

$$\rho c_P \left(\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} + w \frac{\partial T}{\partial z} \right) = k \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} \right) + \mu \Phi \quad (2.19b)$$

3.7 Conservation of Energy (10)

Simplified Form of the Energy Equation

(iii) Ideal gas

$$\rho = \frac{p}{RT} \quad (2.20)$$

$$(2.20) \text{ into } (2.16) \quad \beta = -\frac{1}{\rho} \left(\frac{\partial \rho}{\partial T} \right)_p = \frac{1}{\rho} \frac{p}{RT^2} = \frac{1}{T} \quad (2.21)$$

$$(2.21) \text{ into } (2.15) \quad \rho c_p \frac{DT}{Dt} = \nabla \cdot k \nabla T + \frac{Dp}{Dt} + \mu \Phi \quad (2.22)$$

$$\text{Using continuity (2.2c) and (2.20)} \quad \frac{D\rho}{Dt} + \rho \nabla \cdot \vec{V} = 0 \quad (2.2c)$$

$$\rho c_v \frac{DT}{Dt} = \nabla \cdot k \nabla T - p \nabla \cdot \vec{V} + \mu \Phi \quad (2.23)$$

3-50